

PVC · WOOD · ALUMINUM  
**WINDOWS · ROLLER BLINDS · DOORS · GARAGE DOORS**



**WINDOWS**

---

**TERRACE  
DOORS**





## IF YOU ARE BROWSING THIS FOLDER, IT IS LIKELY THAT:



- A major investment in joinery awaits you - and you want to spend the money as wisely as possible
- You will be choosing from a wide range of offers, difficult to compare - while looking for the best one
- You will come across a lot of technical information and parameters - which are not easy to follow

---

We understand this situation and want to help you make the best decision possible.





## TIPS

We have created this catalog in such a way as to facilitate the process of selecting and purchasing windows. It contains the most important information and proven advice on what to look out for at each stage.



## KNOWLEDGE

We try to explain the trade terms and expressions in a simple way in the GLOSSARY OF TERMS on p. 90



## INSPIRATIONS

Information about the products used in the projects presented in the catalog can be found in the PHOTOGRAPHY INDEX on page 94.

# TABLE OF — CONTENTS





<b>How to choose the right joinery?</b>	<b>6</b>
<b>WINDOWS</b>	<b>14</b>
PVC	14
Wood	26
Aluminum	40
<b>TERRACE DOORS</b>	<b>58</b>
DA-SkyLine sliding door with a concealed frame	62
HST Lift-sliding	66
HKS Tilt-sliding	70
PAS Hoist-sliding	74
Folding	75
<b>Windows and terrace doors colors</b>	<b>80</b>
<b>WINDOW COVERS</b>	<b>82</b>
Pleated roller blinds	84
Textile roller blinds	86
Mosquito Nets	88
<b>Glossary of Terms</b>	<b>90</b>
<b>DAKO Brand</b>	<b>92</b>
<b>Photo index</b>	<b>94</b>

# WHAT AWAITS YOU?

Check how simple the order realization process is

2

## QUICK VALUATION

- + based on the information and arrangements provided by you, we prepare an initial product valuation
- 🆓 the valuation is always free
- @ you don't have to leave your home - you can also get the calculation by contacting us online

1

## PRODUCT SELECTION

- + think about the needs of your home and the expectations of its residents
- + Use the advice and information on the website or the help of a sales specialist



In order to prepare an offer you need a list of windows, i.e. their specification taking into account their quantity and size - we can use a dimensioned project or the dimensions

3

## PAYMENT

- 👤 after the payment is made, the order is transferred to production





# 4

## PRODUCTION TIME

✚ The order submitted for realization in DAKO factory turns into specific windows. We produce them especially for you, according to specifications included in the order.

🕒 we are able to complete a typical order within 2 weeks

# 5

## DELIVERY




When the windows are ready, we deliver them according to the agreed schedule



### EVERYTHING IS READY

Finally, we provide you with the warranty card for the purchased products



## WE ARE AT YOUR DISPOSAL

DAKO sales advisers provide professional service and advice at every stage of investment

Your home is  
Your place on Earth

Find **WINDOWS**,  
that fit it perfectly







673

# TIME FOR GOOD DECISIONS!

In order to find solutions that perfectly match your home, we first try to understand your needs.

## WHAT PRODUCTS DO YOU NEED?


Windows



Balcony windows




Terrace doors



## WHAT ARE THE WINDOWS TO BE IN TERMS OF FUNCTIONALITY?


Tilt-and-turn

Turn only



Tilt only

Non-opening



Sliding

Sliding with an option of tilting or hoisting



## WHAT MATERIAL ARE THEY TO BE MADE OF?

No matter what material you choose, you can be sure of

- obtaining very good performance parameters
- the durability of the material and structure
- high resistance to weathering



**PVC**



**BESTSELLER**

windows selected by almost  
85% of investors



**WOOD**



**TIMELESS CHOICE**

nature, that never  
goes out of style



**ALUMINUM**



**IMPRESSIVE DESIGN**

large construction possibilities  
ideal for modern projects

## WHAT DEPTH OF CONSTRUCTION SHOULD JOINERY HAVE?

Depending on the selected material, you can choose from various options of profile construction depth - the applied thickness affects the window's performance and is associated with the possibility of using specialized glazing packages. In general, the wider the profile, the greater the number of glazing options and the better the thermal and acoustic parameters of the window.





# WHICH PRODUCTS TO CHOOSE?

---

When choosing joinery, it is important to take into account the key values whose optimization provides real benefits for the house and its inhabitants. What product parameters are important?



Why is it so important?  
**THERMAL INSULATION**

---

## ★ SAVINGS

Tight-sealed windows allow you to reduce the amount of energy needed to heat the building and thus reduce your bills.

## ★ COMFORT

Warm interiors provide comfort to residents of the house and make staying there even more pleasant.

## ★ ENVIRONMENTAL CARE

Less energy consumption is a profit not only for our wallet, but also for the planet's ecosystem.



Why should we care about increasing it?  
**SECURITY**

---

## ★ SECURE BUILDING

It is not only a building protected by an alarm system, but also equipped with windows and doors of a higher anti-burglary class or, for example, external blinds.

## ★ HOUSEHOLD SAFETY

Functional solutions are protection against potential accidents, which helps to avoid problems and accidents such as breaking the glass or falling out of the window



- + The thermal insulation coefficient is determined by the U Factor [Btu/h-ft<sup>2</sup>-F] or U<sub>w</sub> [W/m<sup>2</sup>K] - the lower the value of this coefficient, the better it guarantees thermal insulation.
- + The degree of burglary protection determines the level of RC (resistance classes). DAKO products are available in RC2 and RC3 safety classes - more information about their standards and availability can be found at [dako.eu](http://dako.eu).
- + The use of a specialized glass in windows allows to significantly reduce the noise level and improve the comfort of being inside.
- + Visit your window distributor as early as at the design stage to optimise the illumination of your home.





What does it give?  
**SOUND INSULATION**

---

★ **COMFORT AND PEACE**

Staying in quiet interiors undisturbed by the noise of the street or the sounds of airplanes helps to relax and rest, and enables concentration

★ **FREEDOM**

In the comfort of our own home we want to use our personal living space without disturbing the peace of others

★ **CARING FOR HEALTH**

Noise protection has a positive impact on our physiology, learning ability and social behaviour



Why does it matter?  
**NATURAL LIGHT**

---

★ **BETTER MOOD**

Natural light has a positive effect on the mood, stimulates and restores the willingness to act, and even supports the fight against the blues and depression

★ **HEALTH BENEFITS**

Sunlight is essential for our body to produce and assimilate vitamin D. It also helps to treat certain skin diseases, speeds up metabolism and has a positive effect on the circulatory system.

★ **MORE SPACE**

A well-lit room not only seems larger, but also much more cozy and comfortable



Find out more about the VALUES  
OF OUR PRODUCTS  
at [dako.eu](https://dako.eu)





# Everything your HOME needs!

---

Safe, durable windows that provide a  
healthy amount of light



WINDOWS  
—  
PVC





## TRIPLE GLAZING PACKAGE

Noble gas filling



## THERMAL INSULATION

A combination of innovative solutions with full functionality, guaranteeing excellent performance and very good thermal and acoustic insulation.



WINDOWS/PVC

TOP SERIES

# Series DPQ-82

Warm dimension of innovation.

- + **FUNCTIONALITY AND DURABILITY**  
guaranteed by the use of the best raw materials
- + Acoustic insulation that gives  
**PEACE AND COMFORT** to the household members
- + **MAXIMUM SAFETY**  
with a clip and anti-burglary catches



**BESTSELLER**

# Series **DPQ-76**

New standard!  
Optimal performance parameters  
according to requirements.

---

- + **FAVOURABLE THERMAL INSULATION PROPERTIES** in accordance with building requirements
- + Proven quality with **A GUARANTEE OF PEACE OF MIND**
- + The perfect balance of **QUALITY AND PRICE**





### FITTING

Solution with microventilation, four-stage tilt mechanism, dual-function element and anti-burglary catch



### HANDLE


Universal design of the 1006 model



## ATTENTION TO DETAILS AND FINISHES

The high quality of the warm 5-chamber class A profile, energy-efficient double-glazing package with noble gas and functional hardware with microventilation and a four-stage tilt make the DPP-70 windows a frequent choice of investors looking for proven solutions in the economic variant.



 National Fenestration Rating Council® <b>CERTIFIED</b>			
ENERGY PERFORMANCE RATINGS			
U-Factor (U.S. / I-P)		Solar Heat Gain Coefficient	
<b>0.35</b>		<b>0.32</b>	
ADDITIONAL PERFORMANCE RATINGS			
Visible Transmittance		-	
<b>0.51</b>			
<small>Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.  <a href="http://www.nfrc.org">www.nfrc.org</a></small>			



## NFRC CERTIFICATE FOR DPP 70 SERIES

Issued by Keystone Certifications, Inc., which is a recognized research entity on the American market, associating all of the most important manufacturers of joinery.

APPROVED QUALITY

# Series DPP-70

A warm classic.

---

- + **OPTIMAL THERMAL INSULATION** for warm interiors
- + **RICHLY EQUIPPED** fitting with microventilation possibility
- + High-quality class A profile for **QUALITY AND DURABILITY**
- + Proven solution at **FAVORABLE PRICE CONDITIONS**



# SERIES OVERVIEW - technical information

## DPQ-82 SERIES



U Factor =0,14\* Btu/h-ft<sup>2</sup>·F

U<sub>w</sub> =0,77\* W/m<sup>2</sup>K

- 7-chamber class A profile, 3 4/16in (82 mm) thick
- Solid steel in the frame
- Three seals: two edge seals retracted from elastomer EPDM, inner thermo-weldable with TPE

\*Glass 4/18/4/18/4, gas: argon, warm edge spacer, window size 48 7/16in x 58 4/16in (1230mm x 1480mm)

## DPQ-82 SERIES - thermoSecure



U Factor =0,13\* Btu/h-ft<sup>2</sup>·F

U<sub>w</sub> =0,75\* W/m<sup>2</sup>K

- 7-chamber class A profile, 3 4/16in (82 mm) thick, and solid steel in the frame
- Three seals: two edge seals retracted from elastomer EPDM, inner thermo-weldable with TPE
- 2 thermal insulation inserts in the frame and sash
- ECLAZ glass with a warm edge spacer Swisspacer Ultimate
- SecuForte safety handle with double-locking catch in the tilt-and-turn sash

\*Glass 4/18/4/18/4 ECLAZ, gas: argon, warm edge spacer, window size 48 7/16in x 58 4/16in (1230mm x 1480mm)

### The series is also available with an aluminum cladding

- Dimensions for a single sash tilt-and-turn window: Max. width 59 1/16in (1500 mm), max. height 101 3/8in (2575mm)
- Maximum sash area: 24 1/4ft<sup>2</sup> (2,25m<sup>2</sup>)

## DPQ-76 SERIES



U Factor =0,14\* Btu/h·ft<sup>2</sup>·F

U<sub>w</sub> =0,8\* W/m<sup>2</sup>K

- 5-chamber class A profile, 3in thick (76 mm)
- Solid steel in the frame
- Three seals: two edge seals retracted from elastomer EPDM, inner thermo-weldable with TPE
- Dimensions for a single sash tilt-and-turn window: Max. width 59 1/16in (1500 mm), max. height 97 7/16in (2475 mm)
- Maximum sash area 24 1/4ft<sup>2</sup> (2.25m<sup>2</sup>)

\*Glass: 4/14/4/14/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)

## DPP-70 SERIES



U Factor =0,17\* Btu/h·ft<sup>2</sup>·F

U<sub>w</sub> =0,96\* W/m<sup>2</sup>K

- 5-chamber class A profile, 2 3/4in (70 mm) thick
- Solid steel in the frame
- Two EPDM elastomer retractable seals
- Dimensions for a single sash tilt-and-turn window: Max. width 59 1/16in (1500 mm), max. height 101 3/8in (2575mm)
- Maximum sash area 24 1/4ft<sup>2</sup> (2.25m<sup>2</sup>)

\*Glass: 4/14/4/14/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)

# SERIES OVERVIEW - technical information

## DPP-70 R35 SERIES



U Factor = 0,23\* Btu/h·ft<sup>2</sup>·F

$U_w = 1,3^* \text{ W/m}^2\text{K}$

- 5-chamber class A profile, 2 3/4in (70 mm) thick
- Renovation sash 1 3/8in (35 mm), can be undercut to 0
- Dimensions for a single sash tilt-and-turn window: Max. width 58 7/16in (1485mm), max. height 99 9/16in (2530mm)
- Maximum sash area 24 1/4ft<sup>2</sup> (2.25m<sup>2</sup>)

\*Glass: 4/16/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230mm x 1480mm)

## DPP-70 R65 SERIES



U Factor = 0,23\* Btu/h·ft<sup>2</sup>·F

$U_w = 1,3^* \text{ W/m}^2\text{K}$

- 5-chamber class A profile, 2 3/4in (70 mm) thick
- Renovation sash 2 9/16in (65 mm), can be undercut to (7/16in) 10mm
- Dimensions for a single sash tilt-and-turn window: Max. width 57 1/16in (1450mm), max. height 97 1/4in (2470mm)
- Maximum sash area 24 1/4ft<sup>2</sup> (2.25m<sup>2</sup>)

\*Glass: 4/16/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230mm x 1480mm)



## DPQ-82 R65 SERIES



U Factor =0,15\* Btu/h·ft<sup>2</sup>·F

U<sub>w</sub> =0,83\* W/m<sup>2</sup>K

- 7-chamber class A profile, 3 4/16in (82 mm) thick
- Renovation sash 2 9/16in (65 mm), can be undercut to 0
- Dimensions for a single sash tilt-and-turn window:  
Max. width 57 4/16in (1455mm), max. height 97 1/4in (2470mm)
- Maximum sash area 24 1/4ft<sup>2</sup> (2. 25m<sup>2</sup>)

## WHY CHOOSE SERIES ON RENOVATION PROFILES?

- The old frame is preserved and used as a support frame.
- The assembly takes place without interfering with the building's facade.
- The profiles cover the joints from the inside and outside
- The joinery assembly time is short, which allows you to enjoy the house without the hassle of renovation
- Optimization of the amount of light in the window

\*Glass: 4/18/4/18/4, gas: argon, warm edge spacer, window size: 48 7/16in x 58 4/16in (1230mm x 1480mm)



# Nature closer to home

Timeless solutions for lovers of  
classics and eco choices.





Windows  
—  
WOODEN




# How to find **A WOODEN WINDOW THAT PERFECTLY** fits your needs?

---

Wood has been used in construction for centuries. It is an energy-efficient and durable raw material: it guarantees the longevity of products and ensures their high quality, which will be enjoyed by many generations.


Looking for a solution that will work best for our investment, it is worth taking into account three issues that significantly affect the aesthetics, properties and cost of the joinery.



## Durability and properties **WOOD SPECIES**

When creating wood joinery, we choose only carefully selected types of wood, offering our customers materials, and thus products of the highest quality. The wood which is the basis of the structure also influences its final appearance in terms of color saturation or grain pattern.


At DAKO, we finish the joinery with covering varnish or azure varnish made of wood of the following species: pine, meranti, larch.



## Window appearance **PROFILE SHAPE**

The appearance and character of a wooden window is determined primarily by the form of profile finishing and the shape and milling of glazing beads. At DAKO we offer several stylistic variants:

- DDF series with a classic, simple form of finish.
- Products with a rustic, stylish look of the DDR series.
- Modern and extremely durable combinations of wood and aluminum in two variants: DDA series windows (permanently joining elements of wood and aluminum in the profile construction) in and DDF-AL series (profile with aluminum overlay).



## Performance parameters and price **PROFILE THICKNESS**

The width of the profile from which the joinery will be made has a significant impact on the properties of the entire window and the parameters it offers in terms of thermal insulation or acoustic properties. The thickness of the profile also determines the amount of material needed for its production, which significantly affects the final price of the product. In our offer, the joinery is made in three variants of profile thickness: 68 mm, 78 mm and 92 mm.

## WOOD ESSENCE

species available



### MERANTI

cross section

Precious wood from Asia, with excellent technological properties. Used as a raw material, it increases the prestige of finished products. It is distinguished by an exotic grain pattern unusual among native wood species, which is one of the main reasons for its popularity.



### SOLID PINE

cross section

Proven in the production of joinery, traditionally used for making windows. It provides products with very good mechanical properties and high durability. It has a characteristic drawing of coniferous wood. A great advantage of pine is the possibility of obtaining a very favourable price in relation to product quality.



### COMBINED PINE

longitudinal section

Combined squared timber retains the functional qualities of the wood it was made of and has a characteristic image of coniferous wood. It is characterized by very good rigidity and resistance to bending (warping). The use of combined squared timber results in an exceptionally attractive price of products.



### SOLID LARCH

cross section

Extremely resistant wood with oak hardness and twice the fire resistance of pine. It is the only species that does not rot in sea water. In direct contact with the ground, despite extremely unfavourable conditions, it reaches a service life of over 15 years. It is characterized by an exceptionally dense wood grain.

### PEFC

DAKO woodwork has an ecological PEFC certificate recognized around the world, which allows us to sell ecological wood products that come from sustainably managed forests.

**BESTSELLER**

# Series **DDF-78**

Optimal combination of  
aesthetic values  
and functional parameters.

---

- + **THE NOBLE LOOK OF NATURAL WOOD**  
of quality in the most beautiful,  
modern version
- + **WINDOW FINISH WITH A MINIMALIST,  
SIMPLE FORM**
- + **OPTIMAL PARAMETERS OF**  
thermal and acoustic insulation





### UNIVERSAL APPEARANCE

The simple form of profile finishing makes the windows of this series fit perfectly into both classic and more modern interiors.



### HAND-FINISHED

The manual refinement of the construction guarantees perfect smoothness and makes the wood look perfect after varnish finish.



## CLASSIC SOLUTIONS for **DDF SERIES** wooden windows



- + **WINDOW FINISH** with a modern, simple form
- + **EXCELLENT** thermal and acoustic insulation
- + **ULTIMATE COMFORT** of use

---

The series is available in three different variants of profile thickness: **DDF-68 | DDF-78 | DDF-92**



## RUSTIC CHARM OF DDR SERIES wooden windows

Stylized  
profile finish  
from the outside



- + Unique, stylized, **RUSTIC FINISH** shape
- + **DECORATIVE MILLING** of external edges of sashes, frames and glazing beads emphasizing the character of stylish interiors
- + **VERY GOOD** thermal and acoustic insulation and comfort of use

The series is available in three different variants of profile thickness: **DDR-68 | DDR-78 | DDR-92**





## ALUMINUM CLADDING in combination with **DDF SERIES** wooden windows



- + **ELEGANT BEAUTY** of wood enriched with aluminum cladding
- + **RICH STANDARD** of equipment
- + **OPTIMAL THERMAL** insulation parameters
- + **WIDE RANGE OF POSSIBILITIES** of shaping the windows appearance
- + **PROTECTION** against weather conditions

---

The series is available in three profile thickness variants: **DDF-68 AL | DDF-78 AL | DDF-92 AL**



## DDA SERIES WOODEN-ALUMINUM WINDOWS in 8 different finishes

Durable combination  
of wood (inside)  
and aluminum  
(from outside)



- + **THE HIGHEST QUALITY** due to the combination of carefully selected wood with the use of aluminum profiles
- + **EXCELLENT THERMAL** insulation parameters
- + **INCREASED PROTECTION** against the adverse effects of weather conditions
- + **NO GLAZING BEAD** due to the use of innovative, dry glazing (with the glass embedded on the seals)

Series available on profile:  
**DDA-78**





**WOODEN-ALUMINUM WINDOWS**  
DDA-78 SERIES



Possibility to choose from as many as **8 SHAPES**  
of aluminum profile finishing on the outside



Classic



Classic 0.5



Classic Thermo



Integral



Linear



Softline



Quadrat











Quadrat FB



Retro

# SERIES OVERVIEW - technical information

<b>INSTALLATION DEPTH</b>	Profile 2 11/16in (68 mm) 	Profile 3 1/16in (78 mm) 	
<b>PRODUCT FEATURES</b>	<p><b>THE IDEAL SOLUTION FOR INVESTMENTS AND MULTI-FAMILY HOUSING</b></p> <ul style="list-style-type: none"> <li>• Attractive price</li> <li>• Good thermal and acoustic insulation</li> </ul> 	<p><b>THE BEST CHOICE FOR DETACHED HOUSES</b></p> <ul style="list-style-type: none"> <li>• High thermal and acoustic insulation</li> <li>• Optimal performance parameters</li> <li>• Durability and comfort of use</li> </ul> 	
<b>WOOD SPECIES</b>	PINE, LARCH, MERANTI		
<b>SERIES AVAILABLE</b>	<ul style="list-style-type: none"> <li>• DDF - 68</li> <li>• DDR - 68</li> <li>• DDF - 68 AL (aluminum cladding)</li> </ul>	<ul style="list-style-type: none"> <li>• DDF - 78</li> <li>• DDR - 78</li> <li>• DDF - 78 AL (aluminum cladding)</li> </ul>	
<b>U FACTOR VALUE (U<sub>w</sub>)</b>	0.21 Btu/h·ft <sup>2</sup> ·F (1,2 W/m <sup>2</sup> K) <small>glass: 4/16/4; gas: argon; warm edge spacer; window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)</small>	0.16 Btu/h·ft <sup>2</sup> ·F (0,89 W/m <sup>2</sup> K) <small>4/14/4/14/4; gas: argon, warm edge spacer; window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)</small>	
<b>MAXIMUM DIMENSIONS</b>	<ul style="list-style-type: none"> <li>• Dimensions for a single sash tilt-and-turn window: Max. width 66 14/16in (1700 mm), max. height 102 5/16in (2600 mm)</li> </ul>		
<b>STANDARD EQUIPMENT</b>	<ul style="list-style-type: none"> <li>• Triple glazing package (double glazing package in 68 series)</li> <li>• Noble gas filling</li> </ul>		

<p>Profile 3 1/16in (78 mm) (wood-aluminum)</p> 	<p>Profile 3 5/8in (92 mm)</p> 
<p><b>TOP QUALITY WOODEN WINDOW WITH AN ALUMINUM PROFILE</b></p> <ul style="list-style-type: none"> <li>• Guarantee of resistance to weather conditions and mechanical damage</li> <li>• Possibility to choose from 8 shapes of aluminum profiles from the outside</li> <li>• Innovative dry glazing (glazing embedded on seals)</li> </ul> 	<p><b>JOINERY FOR SPECIAL TASKS: THE WARMEST WOODEN WINDOWS IN POLAND ACCORDING TO THE LTB RESEARCH</b></p> <ul style="list-style-type: none"> <li>• Maximum thermal and acoustic insulation</li> <li>• Series awarded with the Gold Quality International Emblem</li> </ul> 
<ul style="list-style-type: none"> <li>• DDA -78</li> </ul>	<ul style="list-style-type: none"> <li>• DDF - 92</li> <li>• DDR - 92</li> <li>• DDF - 92 AL (aluminum cladding)</li> </ul>
<p>windows by up to 30 years and due to a wide selection of colors, textures and patterns of aluminum</p>	
<p>0.13 Btu/h·ft<sup>2</sup>·F (0,75 W/m<sup>2</sup>K) 4/16/4/16/4; gas: argon; warm edge spacer; window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)</p>	<p>0.12* Btu/h·ft<sup>2</sup>·F (0,65 W/m<sup>2</sup>K) glass: 4/12/4/12/4/12/4; gas: argon; warm edge spacer; window size: 48 7/16in x 58 4/16in (1230 mm x 1480 mm)</p>
<ul style="list-style-type: none"> <li>• Maximum sash area 32 4/16 ft<sup>2</sup> (3 m<sup>2</sup>)</li> </ul>	
<ul style="list-style-type: none"> <li>• 3 seals on the perimeter</li> <li>• Standard perimeter fitting</li> </ul>	





# **Dreams in a modern style?**

---

Choose prestigious solutions in an  
innovative design.



WINDOWS  
—  
Aluminum





## ARE YOU INTERESTED IN AN INNOVATIVE DESIGN?

The series is also available in the corner option Thermo 90°

- + **EFFECTIVE WINDOW AESTHETICS** due to the lack of structural profiles in the corner. Connecting the contact of two panes with black glue gives the effect of one line and emphasizes the character of the corner.
- + **GREAT CONSTRUCTIONAL POSSIBILITIES** the division of the glazing surface by means of spacers allows the installation of DA-90 Thermo system windows with different types of opening



Are you looking for an internal system or an unusual option with an invisible sash? Check out other solutions for aluminum windows at [www.dako.eu](http://www.dako.eu)





THE WARMEST SERIES

# Series DA-90 Thermo

The best option for thermal  
and acoustic insulation.

- + **EXCELLENT** thermal and acoustic insulation, ideal for passive houses
- + **ELEGANT APPEARANCE** due to concealed hinges as standard
- + additional **PROTECTION AGAINST BURGLARY** due to the use of 4 anti-burglary locks
- + **GUARANTEE OF PEACE** resulting from good acoustic insulation

OPTIMAL CHOICE

# Series DA-77

Large possibilities in three  
system variants:  
standard, with concealed sash  
and fire protection

- + **VERY GOOD LEVEL OF** thermal **INSULATION**
- + possibility of constructing **LARGE-SIZE GLAZING** due to profiles with favourable statics
- + The system **IS IDEAL FOR MODERN, DEMANDING PROJECTS.**
- + **POSSIBILITY OF USING SPECIAL GLAZING:** energy-saving, anti-burglary and other
- + **MODERN DESIGN** guaranteeing an elegant appearance of the facade also from the outside



## DA-77 SERIES



### OPTION

The series is also available in the corner version DA-77 90°



U Factor = 0,18\* Btu/h·ft<sup>2</sup>·F

$U_w = 1,0 \text{ W/m}^2\text{K}$

- 4-chamber profile (Sash: 3 6/16 in (86mm) | Frame: 3 1/16 in (77mm))
- Thermal breaks 1 11/16 in (43mm)
- Two EPDM seals
- Glazing range: 13/16 in to 2 10/16 in (from 21 to 67 mm)
- Dimensions for Tilt-and-turn window: min.: 16 9/16 in x 16 9/16 in (420 mm x 420 mm), Max.: 63 in x 94 8/16 in (1600 mm x 2400 mm)
- Maximum sash area: 32 5/16 ft<sup>2</sup> (3m<sup>2</sup>)

\*Glass 4/18/4/18/4 window size 48 7/16 in x 58 4/16 in (1230 mm x 1480 mm)



# SERIES OVERVIEW - technical information

## DA-77 US SERIES



U Factor = 0,14\* Btu/h·ft<sup>2</sup>·F

$U_w = 0,8 \text{ W/m}^2\text{K}^*$

- System with concealed wing of exceptional aesthetics
- 4-chamber profile (Sash: 3 3/16 in (80,8mm) | Frame: 3 1/16 in (77mm))
- Glazing range: 10/16 in to 2 6/16 in (from 15 to 60 mm)
- Tilt and turn sash dimensions: min.: 21 11/16 in x 21 11/16 in (550 mm x 550 mm), Max.: 63 in x 98 7/16 in (1600 mm x 2500 mm)
- Maximum: sash area: 32 5/16 ft<sup>2</sup> (3m<sup>2</sup>) weight: 286,6 lb (130kg) (330,7 lb (150kg))

## DA-77 EI SERIES



U Factor = 0,14\* Btu/h·ft<sup>2</sup>·F

$U_w = 0,8 \text{ W/m}^2\text{K}^*$

- 5 chamber profile  
System in fire standard with fire resistance class EI 30 according to EN 13501-2+A1
- 4-chamber profile (Sash: 3 6/16 in (86mm) | Frame: 3 1/16 in (77mm))
- Glazing range: 10/16 in to 1 10/16 in (from 41 to 60 mm)
- Tilt-and-turn sash dimensions: min.: 21 11/16 in x 21 11/16 in (550 mm x 550 mm), Max.: 63 in x 98 7/16 in (1600 mm x 2500 mm)
- Maximum: sash area: 32 5/16 ft<sup>2</sup> (3m<sup>2</sup>) weight: 286,6 lb (130kg) (330,7 lb (150kg))

\*Glass 4/18/4/18/4, window size 48 7/16 in x 58 4/16 in (1230 mm x 1480 mm)

$U_w$  of the window size 78 12/16 in x 39 3/8 in (2000 mm x 1100 mm) with 2-chamber glass 4/18/4/18/4, with warm distance frame and fire glass in EI30 class

## DA-90 THERMO SERIES




U Factor = 0,14\* Btu/h·ft<sup>2</sup>·F

U<sub>w</sub>\* = 0,8 W/m<sup>2</sup>K

- Glazing range: 15/16 in to 3 4/16 in (from 23 to 82 mm)
- Dimensions for Tilt-and-turn window: min.: 20 8/16in x 16 9/16in (520 mm x 420 mm), Max.: 66 14/16in x 110 3/16in (1700 mm x 2800 mm)
- Maximum sash area: 32 4/16ft<sup>2</sup> (3m<sup>2</sup>)
- Max. sash weight: 330,7 lb (150kg)
- 3-chamber profile - Frame: 3 9/16in (90 mm) • Thermal breaks 1 8/16in (45 mm) • Insulation insert in the middle chamber • Three EPDM seals in the opening windows

U<sub>w</sub> of reference window with dimensions of 48 7/16in x 58 4/16in (1230 mm x 1480 mm) with standard glass 4X18x4x18x4

## DA-90 THERMO 90° SERIES

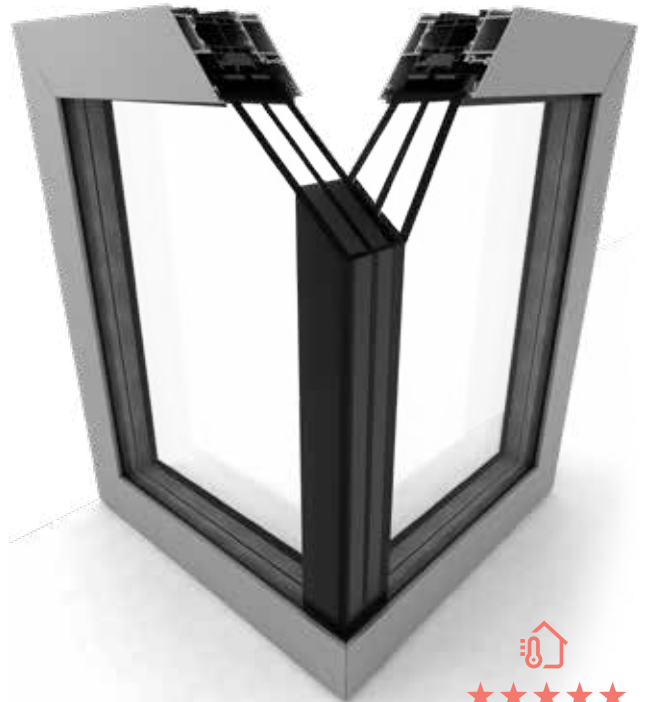

U Factor = 0,14\* Btu/h·ft<sup>2</sup>·F

U<sub>w</sub>\* = 0,8 W/m<sup>2</sup>K

- Glazing range: 1 4/16 in to 2 13/16 in (from 32 to 72 mm)
- Dimensions: min.: 22 1/16in x 22 1/16in x 22 1/16in (560 mm x 560 mm x 560 mm),
- Max.: 94 7/16in x 118 1/16in x 118 1/16in (2400 mm x 3000 mm x 3000 mm)

U<sub>w</sub> of reference window with dimensions: 2 x 48 7/16in x 58 4/16in (2x 1230 mm x 1480 mm) with standard glass 4X18x4x18x4



Are you looking for an internal system or an unusual option with an invisible sash? Check out other solutions for aluminium windows at [www.dako.eu](http://www.dako.eu)



# Small things that make a big difference

---

The most important thing is to  
match the colors and windows  
equipment to your needs.



AKO



**OPTIONS**  
accessories

# A HANDLE the one you want



For details on the availability of colors in individual handle models, see [www.dako.eu](http://www.dako.eu).

## SELECTED HANDLE MODELS



1006



1007



1009



1033



Hoppe SecurForte  
Hamburg



Hoppe Secustik  
New York



Hoppe Secustik  
Luksemburg



1006D  
with a button




1006A  
with a key



Hoppe Secustik  
Luksemburg with a key

## HANDLE COLORS

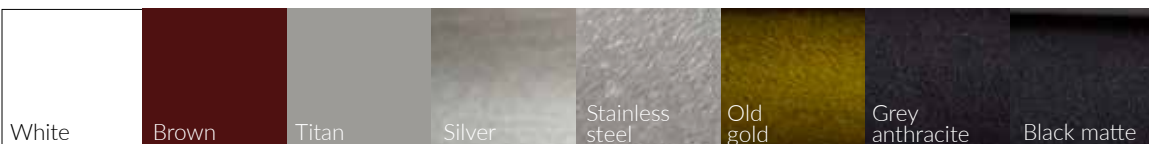



# FUNCTIONALITY AND SECURITY IN A PACKAGE

## SAMPLE SELECTION



### DOUBLE-GLAZING PACKAGE

#### GLAZING PACKAGE SINGLE-CHAMBER:

2 glass panes, a spacer and a noble gas pressed between the panes




### TRIPLE GLAZING PACKAGE

#### GLAZING PACKAGE TWO-CHAMBER:

3 glass panes, spacer frames and filling the space between the glass with noble gas

## DECORATIVE GLASS

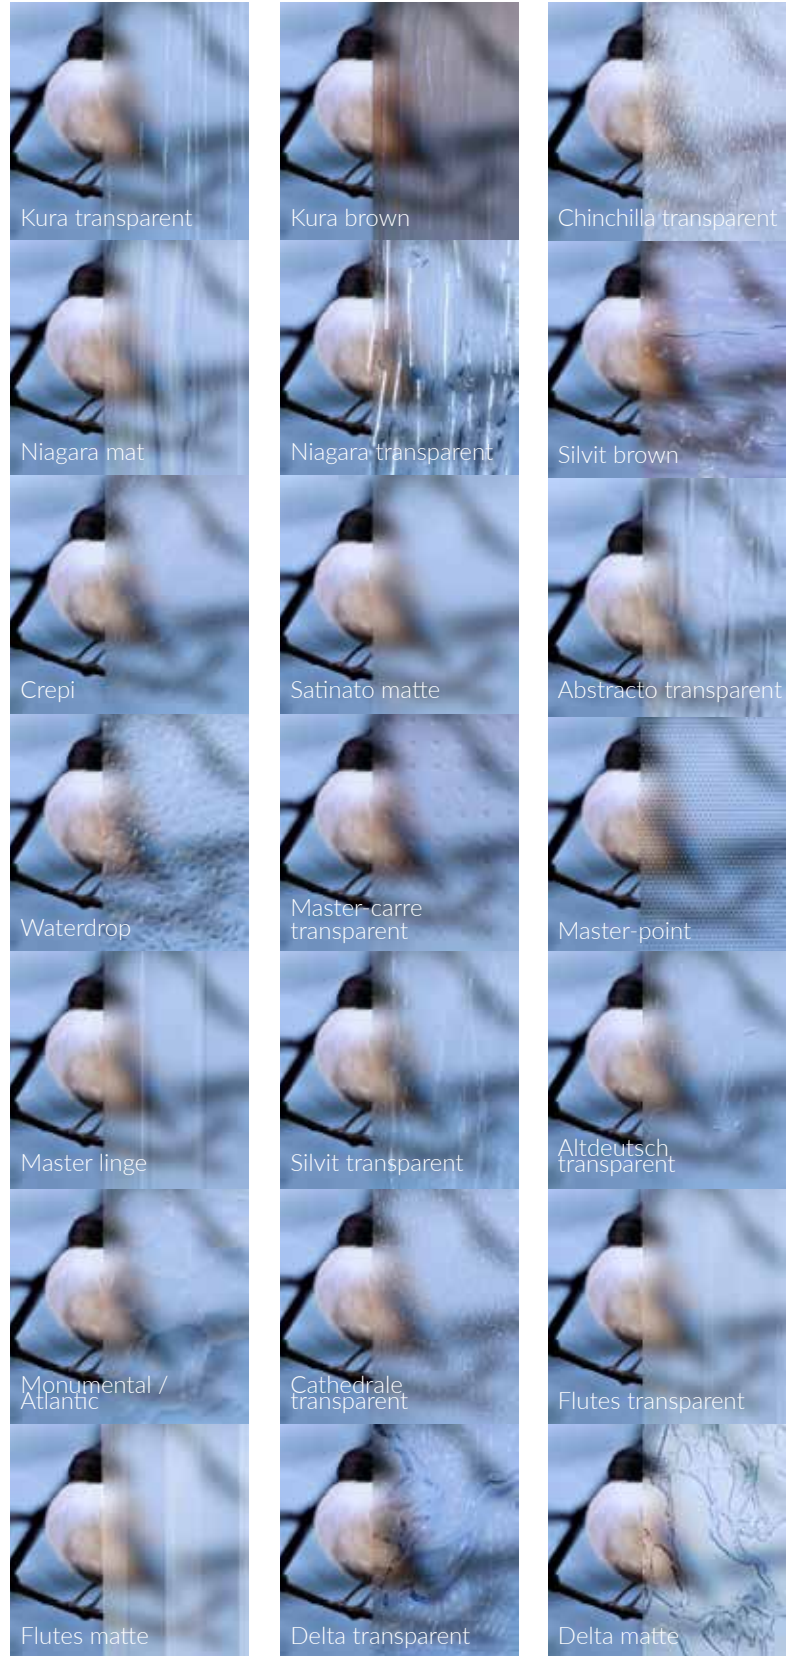



Glazing is a very important element of windows which affects, among other things, their thermal efficiency and the amount of solar energy entering the interior. A larger number of chambers in the glazing package, a lower coefficient in the glass and a noble gas in the inter-pane space improve the thermal insulation.



# PANE BARS a stylish window accessory

Pane bars are a perfect complement to the windows. They can be both a window decoration referring to the stylish architecture and interiors, as well as the crowning of a modern window construction. They give interiors a special atmosphere and give the buildings facade a unique character.

## **INTERNAL PANE BARS**

- + placed in the inter-pane space during the production process of glazing packages (do not make cleaning windows difficult!)

## **PANE BARS VIENNA**

- + glued directly to the surface of the glass (they divide the glass into smaller, limited areas, which means that cleaning the windows may take more time)






## Check which pane bars fit your windows

The thickness and color of the pane bars depend on the material from which the windows are made - ask your salon advisor about the availability of options in the selected system.

# RELIABILITY AND DURABILITY

BASED ON THE  
HIGHEST QUALITY FITTINGS

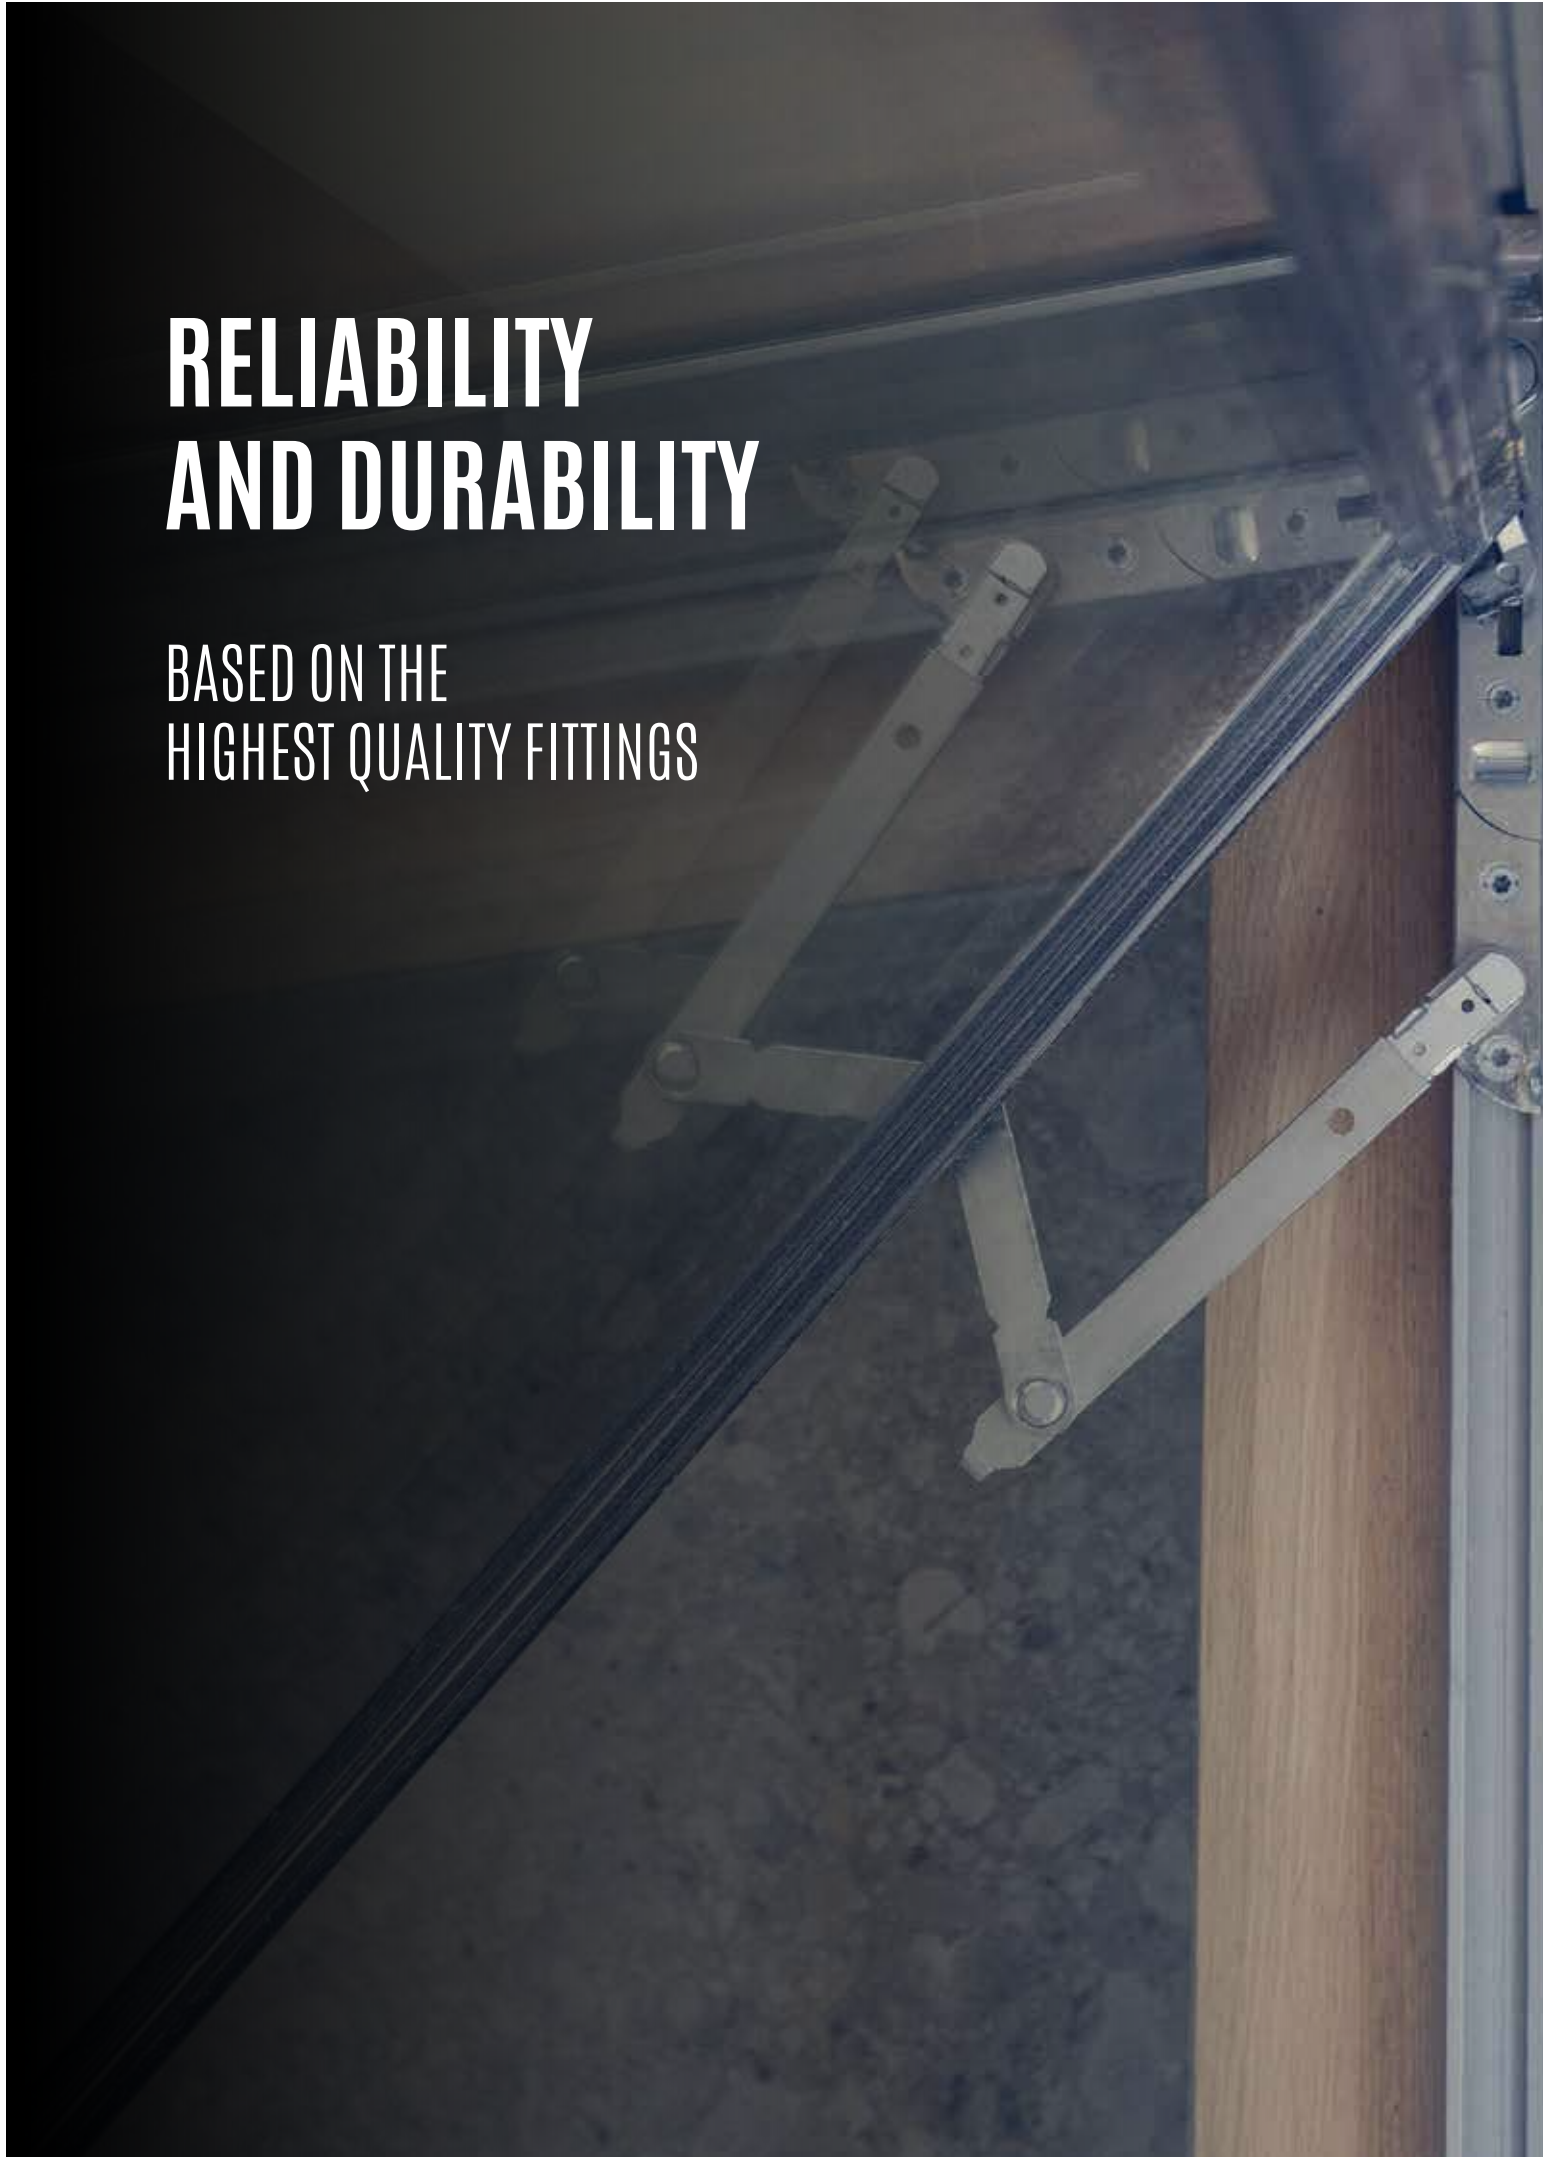

DAKO windows owe their functionality to high quality components, in particular solid fitting solutions. It is due to these elements that smooth operation of even large windows is possible without any effort. The fittings also guarantee the proper tightness of the windows and increase the level of security due to the use of anti-burglary elements. Discover the most popular fittings functions.



### **MICROVENTILATION**

It allows to gently unseal the window and improve air exchange. The slot airing system allows the frame to be set aside by several mm, so we can air the room without cooling it.



### **ENHANCED AESTHETICS**

Due to the use of CONCEALED HINGES, when the sash is closed the hinges are invisible, which gives windows an exceptionally elegant look and makes it easier to keep clean.




### **INCREASED SECURITY**

The STANDARD PLUS fitting is equipped with two anti-burglary catches in each sash. In Tilt and Turn sashes one of the catches is a unique anti-burglary lock with double locking, available at DAKO only. Additionally, the fitting features a handle rotation lock with a lifter.

The FIRST TILT option, in which positioning the handle horizontally tilts the window, and full opening requires setting the handle in a vertical position. In combination with the TBT handle it allows to limit the possibility of opening the sash. Without using the key, they can only be tilted, which eliminates the risk of falling out.



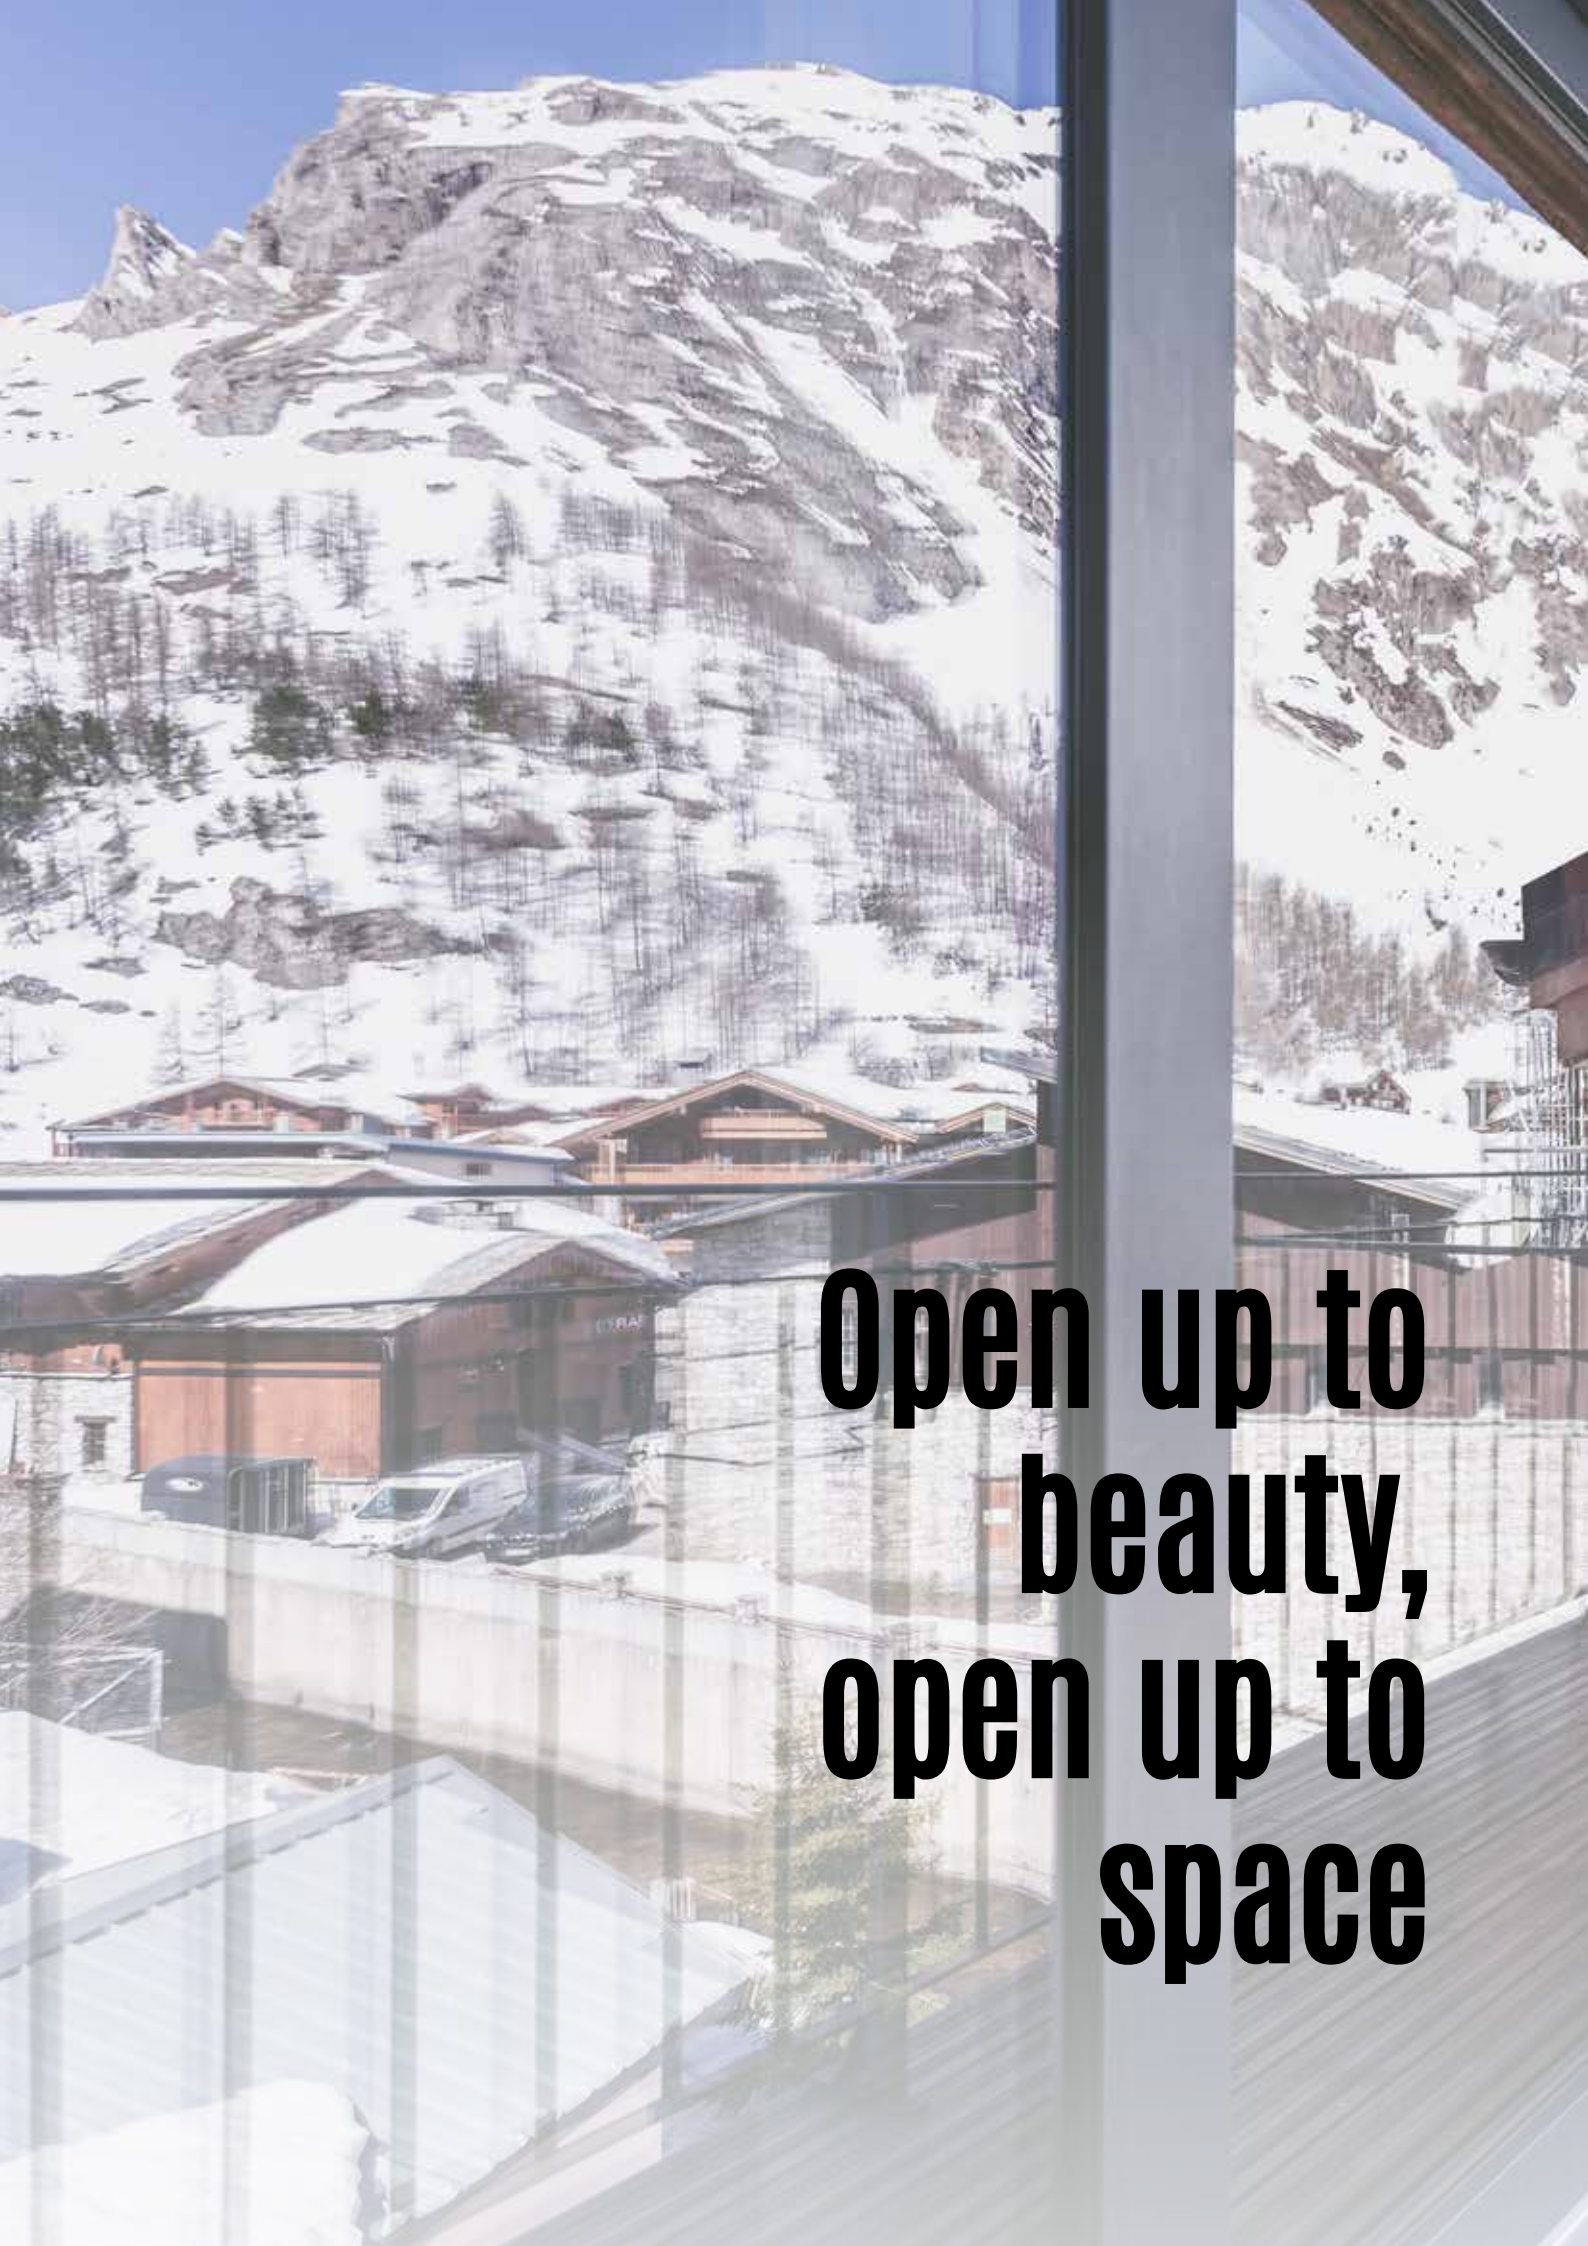

**Open up to  
beauty,  
open up to  
space**



TERRACE DOORS

**TERRACE**  
DOORS

58-59

**DAKO**<sup>®</sup>




# Find your exit to the terrace!

## Find out which solution best suits your home.

---

When choosing joinery, whose task will be to connect the interior of the house with the terrace, we can choose from several different options such as the so-called balcony doors - but mainly functional options in terms of sliding solutions.

Therefore, we will try to present all their good and bad sides clearly, while also explaining how the different types of doors actually differ.

<b>TILT-AND-TURN DOORS</b>	<b>SLIDING TERRACE DOORS</b>			
				
<p><b>CLASSIC BALCONY DOOR,</b> with a fixed or a movable post is actually a window with dimensions allowing a free passage</p>	<p>Sliding <b>SKYLINE HST</b></p>	<p>Tilt – sliding <b>HKS</b></p>	<p>Hoist – sliding <b>PAS</b></p>	<p><b>FOLDING</b></p>
<p>The solution is available in the window series presented in the first part of the catalog (p. 14-45)</p>	<p>A detailed description of these solutions and their availability is presented on the following pages (p. 60-73)</p>			





## Why are sliding doors a good choice?

The most important advantages of the solution are:

### ★ AESTHETIC APPEARANCE WITH A MODERN DESIGN

possibility of constructing large, impressive glazings that optically enlarge the interior and an increased glazed area providing greater access to natural sunlight.

### ★ SPACE-SAVING

due to an opening system that does not require additional space inside the room

### ★ FUNCTIONAL TECHNOLOGIES

allowing for lightweight and comfortable operation of terrace doors, despite their heavy weight and size

### ★ EXCELLENT PERFORMANCE PARAMETERS

guaranteeing thermal and acoustic insulation at the optimum level for the house

**NEW**

Terrace sliding door with a  
concealed frame

# DA-SkyLine

Panoramic views with no limits.

- + Innovative **CONCEALED FRAME SYSTEM**, built in walls, floor and ceiling
- + **NARROW PROFILES** with maximum surface area Glazing - visible width of the door sash connection: 1 in (25mm)
- + **IMPRESSIVE DIMENSIONS** and the possibility of constructing sliding doors up to 472 7/16 in (12m) wide and 157 8/16 in high
- + spectacular, **PANORAMIC GLAZING** while maintaining excellent thermal insulation parameters of the structure (U Factor = 0,15\* Btu/h·ft<sup>2</sup>·F, U<sub>w</sub> from 0,85\* m<sup>2</sup>K)


\* for doors with sash dimensions of: 81 1/2 in x 135 7/16 in (2 070 mm x 3440 mm), Glass 4/18/4/18/4 and a warm edge spacer





### LUXURIOUS DESIGN

Innovative technology allowing to hide the frame in the walls, floor and ceiling allows to obtain a spectacular, panoramic glazing while maintaining excellent thermal insulation parameters of the structure.

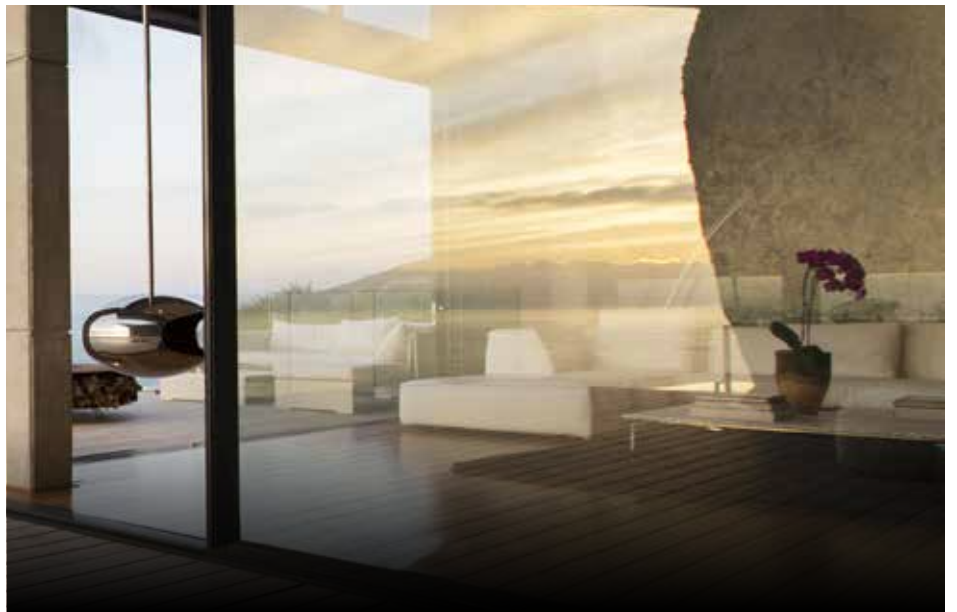


### SPECTACULAR GLAZING

The system enables the construction of sliding doors of impressive dimensions: with almost unlimited width and height up to 157 8/16 in (4m)! The slim door design gives the impression of lightness despite its large size.





# SkyLine sliding terrace doors with a concealed frame - technical information

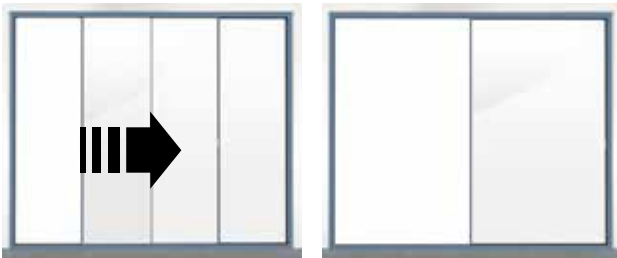Opening by sliding it horizontally allows to fully open the movable sash.




MATERIAL	MAX. CONSTRUCTION WIDTH	MAX. CONSTRUCTION HEIGHT	MAX. SASH WIDTH	MAX. SASH AREA
ALUMINIUM	No restrictions - the door can be connected to each other and form a uniform glazing sequence	157 1/2in (4 000 mm)	118 1/8in 3 000 mm	129 3/16ft <sup>2</sup> 12 m <sup>2</sup>

OTHER	HANDLES
 <p>option of automatic door control with remote control</p>	 <p><b>Standard color:</b> joinery color</p>



The table determines the maximum dimension that can be obtained under favourable conditions of installation using a specific construction and profile scheme. Ask your dealer for details of possible door sizes within your chosen solution.

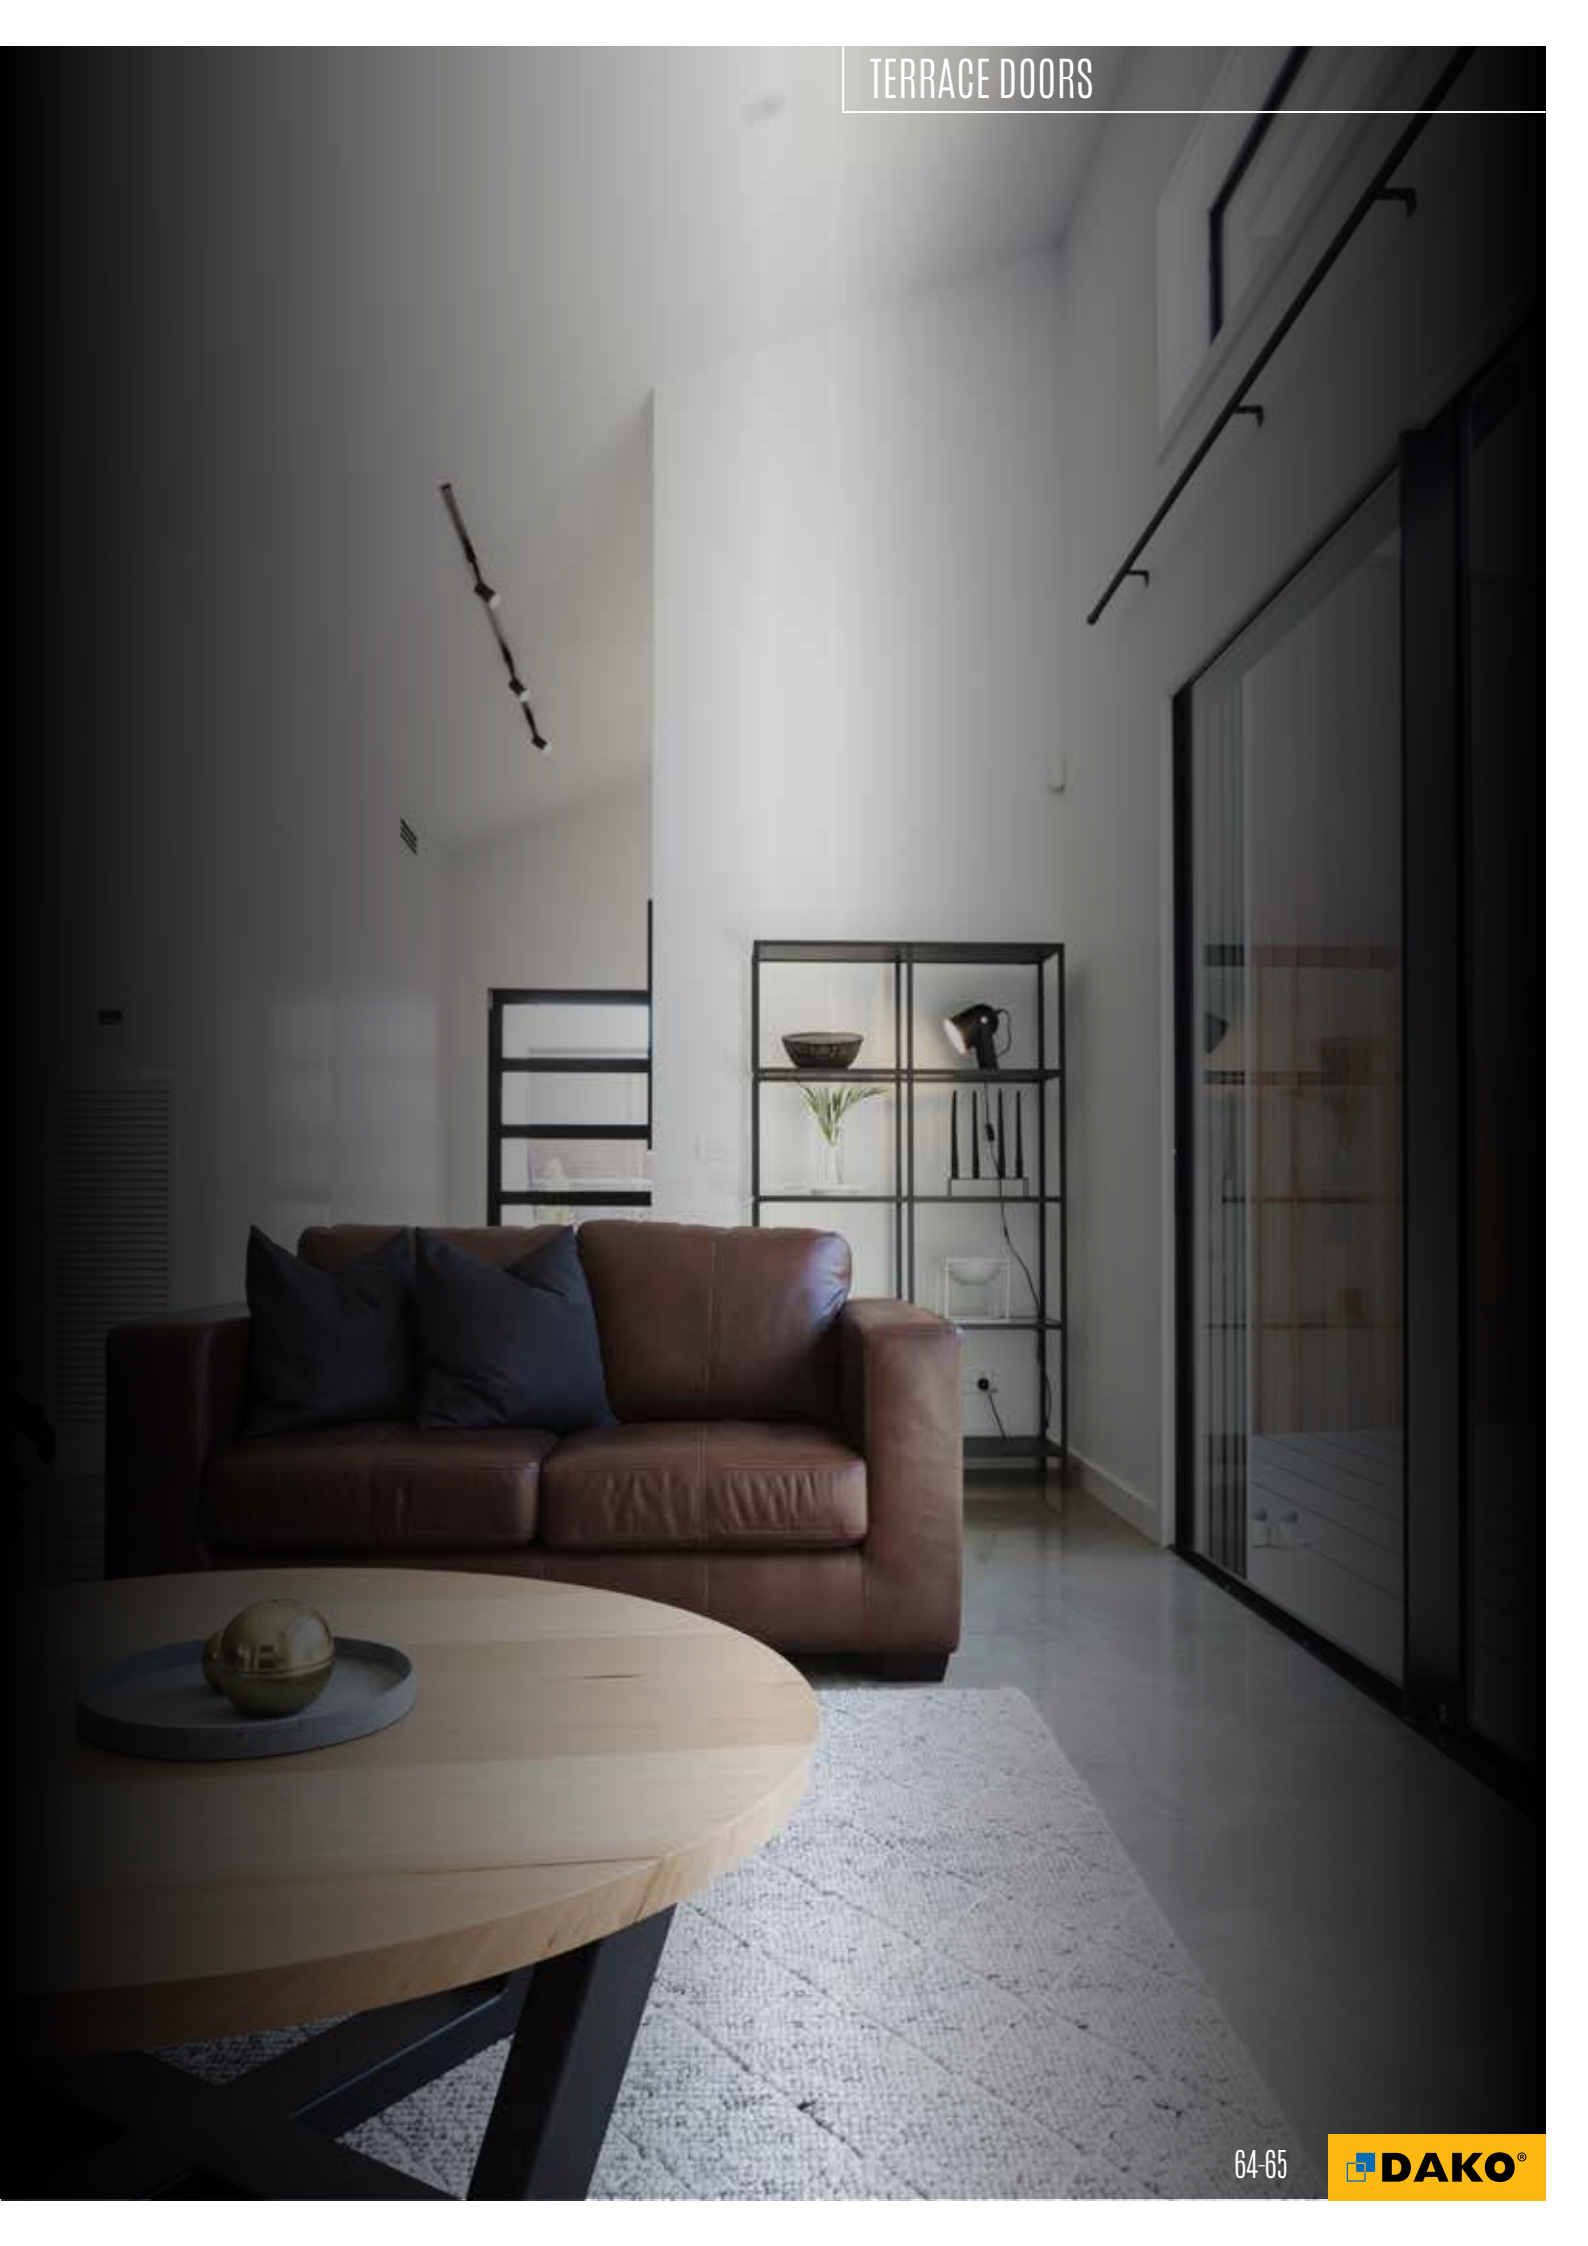



### **LIGHTWEIGHT OPERATING SYSTEM**

The solution enables comfortable use of the door, guaranteeing comfortable opening and closing even with large dimensions.



### **LOW THRESHOLD**

The low threshold construction, thanks to its alignment with the floor and terrace plane, makes it much easier to move between the interior of the house and the terrace or garden.





# Lift - sliding terrace doors **HST**

Great opportunities to gain more!  
Space, light, proximity to nature.







- + **MAXIMUM PRESTIGE AND ELEGANCE** guarantee a beautiful appearance
- + **OPTIMAL THERMAL PARAMETERS**
- + **HIGH FUNCTIONALITY** due to the possibility of aligning the threshold with the floor and due to the practical opening by shifting it in line, the system allows you to save additional space inside

# HST terrace doors- technical information

Opening by sliding it horizontally allows you to fully open the movable sash.  
Airing is possible by blocking the partially offset moving sash.



MATERIAL	MAX. WIDTH CONSTRUCTION	MAX. HEIGHT CONSTRUCTION	MAX. SASH WIDTH	MAX. AREA SASHES
PVC	255 14/16in (6 500 mm)	106 4/16in (2 700 mm) white 98 6/16in (2 500 mm) other colors	118 1/16in (3 000 mm) white 98 6/16in (2 500 mm) other colors	69 15/16ft <sup>2</sup> (6,5 m <sup>2</sup> ) white 59 3/16ft <sup>2</sup> (5,5 m <sup>2</sup> ) other colors
WOOD	236 3/16in (6 000 mm)	102 5/16in (2 600 mm)	118 1/16in (3 000 mm)	69 15/16ft <sup>2</sup> (6,5 m <sup>2</sup> )
ALUMINUM	472 7/16in (12 000 mm)	129 14/16in (3 300 mm)	129 14/16in (3 300 mm)	88 12/16ft <sup>2</sup> (8,25 m <sup>2</sup> )

OTHER	HANDLES
 <p>option of automatic door control with remote control</p>	 <p><b>The handle is available in colors:</b> white (RAL 9016), brown (8019), silver-plated (F1), old gold (F4), titanium (F9), dark grey (RAL 7016), black (RAL 9005) and in various versions: such as: single-sided, double-sided, with a cylinder, with a key etc.</p>
 <p>option of automatic door control with remote control</p>	 <p><b>The handle is available in colors:</b> white (RAL 9016), brown (8019), silver-plated (F1), old gold (F4), titanium (F9), and in various versions: such as: single-sided, double-sided, with a cylinder, with a key etc.</p>
 <p>option of automatic door control with remote control for DA-77 HST</p>	 <p><b>The handle is available in colors:</b> white, black and any RAL and in different versions: e.g. single-sided, double-sided, with a cylinder, with a key etc.</p>



The table determines the maximum dimension that can be obtained under favourable conditions of installation using a specific construction and profile scheme. Ask your dealer for details of possible door sizes within your chosen solution.



# Tilt - sliding terrace doors **HKS**

Economical option  
for a good view!

- + the option of tilting the movable sash allows for free rooms ventilation
- + **SIMPLE OPERATION AND USE OF** the system
- + favourable price





### TILT FUNCTION

Sliding horizontally allows you to fully open the movable sash, and the possibility of tilting the movable sash along the upper edge allows for rooms ventilation.




### FUNCTIONALITY AT A GOOD PRICE

Optimization of production costs determines the high availability of the product also for customers with a more limited budget - so that elegant and fashionable large glazing can be found in any home.



# HKS terrace doors - technical information

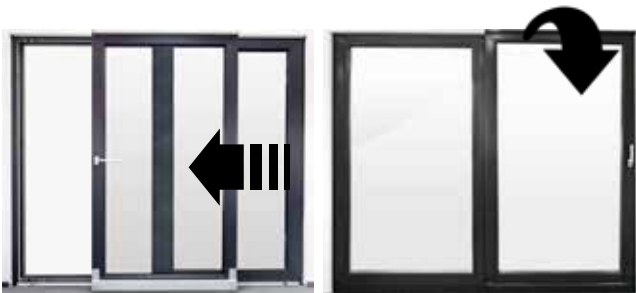Opening by sliding it horizontally allows you to fully open the movable sash. Airing is possible by tilting the movable sash along the upper edge.



MATERIAL	MAX. WIDTH OF CONSTRUCTION	MAX. HEIGHT OF CONSTRUCTION	MAX. SASH WIDTH	MAX. SASH AREA
PVC	157 7/16in (4 000 mm)	97 10/16in (2 480 mm)	59 1/16in (1 500)	36 4/16ft <sup>2</sup> (3,37 m <sup>2</sup> )
WOOD	118 1/16in (3 000 mm)	97 10/16in (2 480 mm)	58 4/16in (1 480 mm)	36 4/16ft <sup>2</sup> (3,37 m <sup>2</sup> )
ALUMINUM	157 7/16in (4 000 mm)	97 10/16in (2 480 mm)	58 4/16in (1 480 mm)	36 4/16ft <sup>2</sup> (3,37 m <sup>2</sup> )



HANDLES	
HKS	HKS AUTOMATIC
 <p><b>The handle is available in colors:</b> white, brown, silver (F1), brass (F3), old gold (F4), titanium (F9), dark grey (RAL 7016), black (RAL 9005), dark grey (RAL 7016)</p>  <p>Handle with a key is available in colors: white, brown, silver (F1), old gold (F4), titanium (F9), dark grey (RAL 7016), black (RAL 9005)</p>	 <p><b>The handle is available in colors:</b> white, brown, silver (F1), old gold (F4) and titanium (F9).</p>
 <p><b>The handle is available in colors:</b> available colors: white, brown, silver</p>	



The table determines the maximum dimension that can be obtained under favourable conditions of installation using a specific construction and profile scheme. Ask your dealer for details about the possibilities within your chosen solution.



# Hoist - sliding terrace doors **PAS**

Comfortable room  
airing.

- + safe and **ENERGY-EFFICIENT VENTILATION** with the function of putting the sash away from the frame by a distance of 6 mm
- + **COMFORT** regardless of the weather (effective ventilation during rainfall, and a stable position of the sash eliminates the risk of the sash hitting the frame under wind pressure)
- + light and quiet door operation



# Folding Door


Modern,  
impressive design.

- + **MAXIMUM PASSAGE LIGHT**
- + **THE SASHES FOLD TO THE SIDE EDGES,** and when all sashes are folded, almost the entire door surface is opened
- + **FUNCTIONALITY AND CONVENIENCE** of use
- + two ways of opening the door: outwards and inwards



# PAS terrace doors - technical information


Opening by sliding it horizontally allows you to fully open the movable sash. The possibility of putting the movable sash aside by several mm on the whole perimeter allows for safe ventilation of rooms.

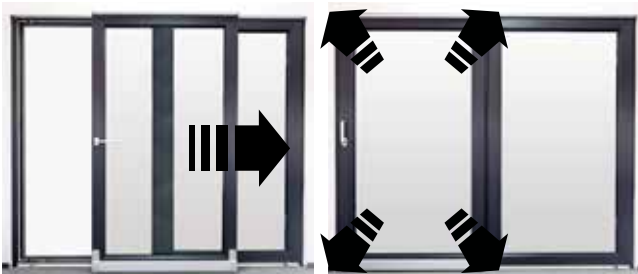

PRODUCT	MATERIAL	MAX. WIDTH OF CONSTRUCTION	MAX. HEIGHT OF CONSTRUCTION	MAX. SASH WIDTH	MAX. SASH AREA
PAS	PVC	157 7/16in (4 000 mm)	97 10/16in (2 480 mm)	59 1/16in (1 500)	36 4/16ft <sup>2</sup> (3,37 m <sup>2</sup> )
FOLDING DOOR	ALUMINUM	236 3/16in (6 000 mm)	110 3/16in (2 800 mm)	39 3/8in (1 000 mm)	36 4/16ft <sup>2</sup> (2,8 m <sup>2</sup> )

# Folding doors - technical information

Opening by folding the sashes to the side edges, so that after folding all the sashes, almost the entire door surface is opened. Different design variants in terms of quantity and functionality of turn sashes.

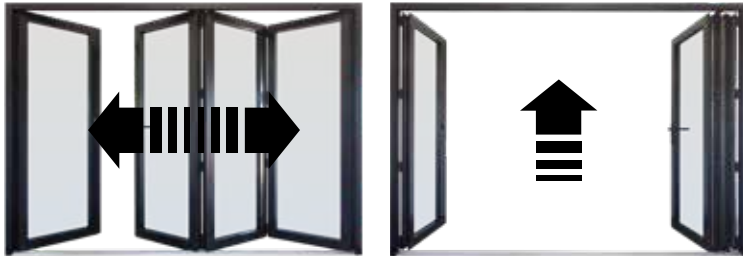

## HANDLES



**The handle is available in colors:**

white, brown, silver (F1), brass (F3), old gold (F4), titanium (F9), dark grey (RAL 7016), black (RAL 9005)



Handle with a key is available in colors: white, brown, silver (F1), old gold (F4), titanium (F9), dark grey (RAL 7016), black (RAL 9005), dark grey (RAL 7016), black (RAL 9005)



**Handle on a long backplate available in colors:** white, black



**Additional handle available in colors:** white, black




The table determines the maximum dimension that can be obtained under favourable conditions of installation using a specific construction and profile scheme. Ask your dealer for details of possible door sizes within your chosen solution.

# Basic schemes for opening sliding doors




## MORE POSSIBILITIES


In the case of aluminum joinery, it is also possible to make more complex structures in additional schemes - ask your sales representative in the showroom for details.




Scheme A

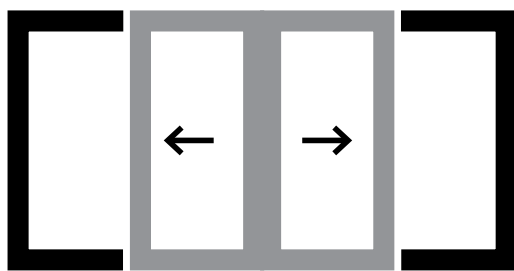


Scheme C

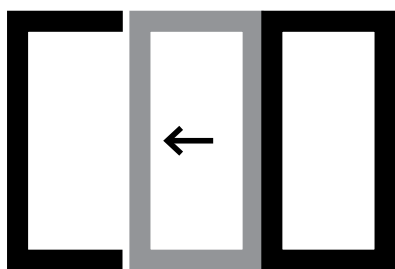

Scheme C Variant



Scheme D

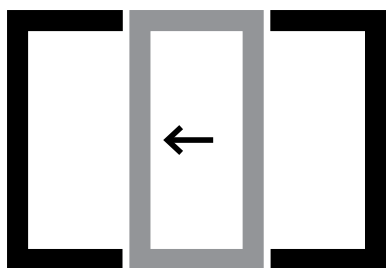

Scheme G2




Scheme K

 movable sash of the structure

 elements of fixed parts (frames or sashes)

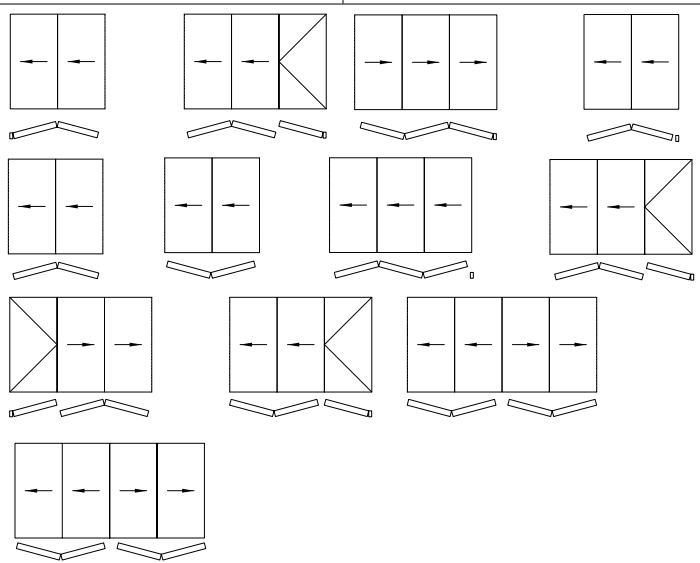

SYSTEM	MATERIAL	SCHEMES AVAILABLE	PRODUCT SERIES
SKYLINE	ALUMINUM	Scheme A Scheme D Scheme C Scheme K	DA-SkyLine
HST	PVC	Scheme A Scheme C Scheme D Scheme K Scheme C variant	DPP-70 HST DPQ-82 HST DPQ-82AL HST*
	WOOD	Scheme A Scheme C Scheme D Scheme G2	DDF-68 HST DDF-78 HST DDF-92 HST DDA-78 HST
		Scheme A	DDF-68 AL HST; DDF-78 AL HST; DDF-92 AL HST; DDA-78 HST CLASSIC; DDA-78 HST QUADRAT FB (wood with overlay and wood-aluminum)
HKS	Aluminum	Scheme A Scheme C Scheme D Scheme G2 Scheme K	DA-51 HST DA-77 HST DA-51 HST
	PVC	Scheme A Scheme K (division into 4 equal parts) Scheme C Scheme C variant	DPP-70, DPB-73, DPB-73+, DPQ-76, DPQ-82, DPQ-82 thermoSecure, DPQ-82AL, DPQ-82 thermoSecure AL
HKS	WOOD	Scheme A Scheme C	DDF-68, DDF-78, DDF-92, DDA-78
	PAS	PVC	Scheme A Scheme K (division into 4 equal parts) Scheme C variant
FOLDING	Aluminum		

\* Only occurs in scheme A

# The colors of your place on Earth

## Colors of windows and terrace doors


JOINERY  
PVC

### BASIC COLORS



### SPECIAL COLORS


The most popular customer choices

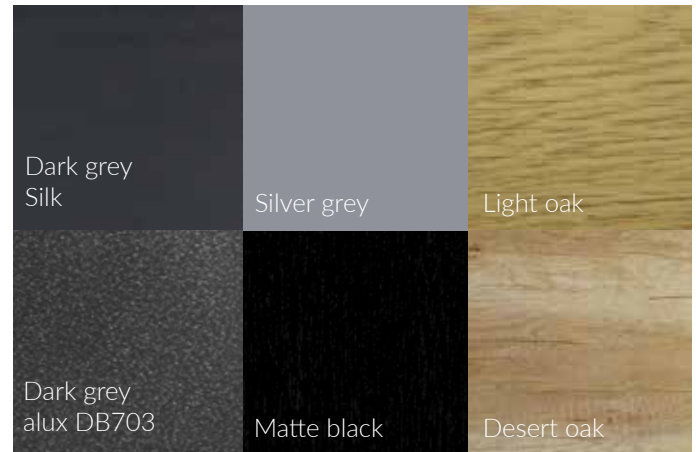

You can check the full range of PVC colors available on our website [www.dako.eu](http://www.dako.eu) or in our showrooms

### SPECIAL COLORS


Other colors

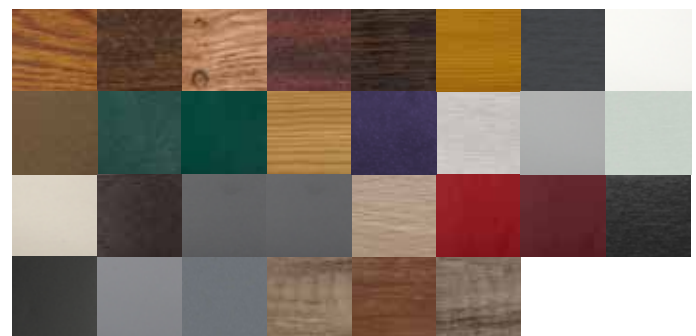

**JOINERY  
WOODEN**


**TRANSPARENT COLORS**

pine, larch, meranti

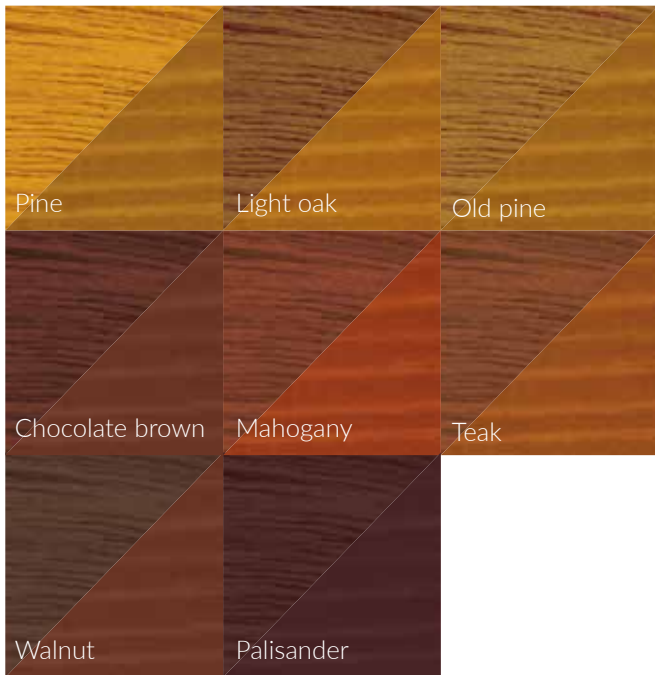

The coloring of varnishes varies depending on the wood on which it was used. The material presents an illustrative coloring of transparent colors on pine and larch woodwork (right side) and meranti (left side).

**OPAQUE COLORS**




**OPTIONAL COLORS**

Any color from the RAL palette



**JOINERY  
ALUMINUM**

**BASIC COLORS**

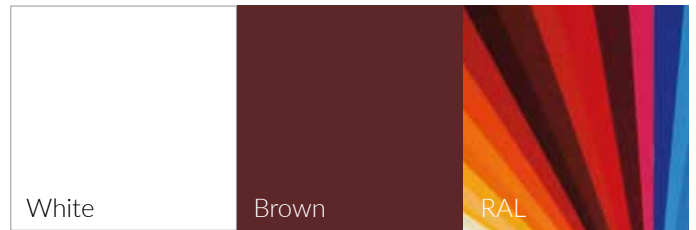

**WOOD-LIKE VARNISHES**



**SPECIAL COLORS - VENEERS**

Colors not available for terrace doors





A modern kitchen interior featuring a dark countertop, white upper cabinets, and a window with dark horizontal blinds. A pink chair is visible in the foreground, and a small potted plant sits on the counter. The overall aesthetic is clean and contemporary.

**It's important,  
that the house is  
comfortable**

---

and ensures the protection of  
residents' privacy



## WINDOW COVERS

Textile roller blinds  
Pleated roller blinds  
Mosquito nets


# Pleated **ROLLER BLINDS**

- + covers enabling **ANY HORIZONTAL COVERING OF THE WHOLE OR PART** of the glass
- + durable and modern **MATERIALS IN MANY** structure and color variants
- + **WIDE RANGE OF COLORS** of operating mechanisms
- + possibility of fully opening the window sash



### OPERATION OF THE PLEAT:

- The pleat material is attached to 19 mm high aluminum profiles
- The pleat is moved on the strings fixed in the window sash's glazing recess using the supplied handles.

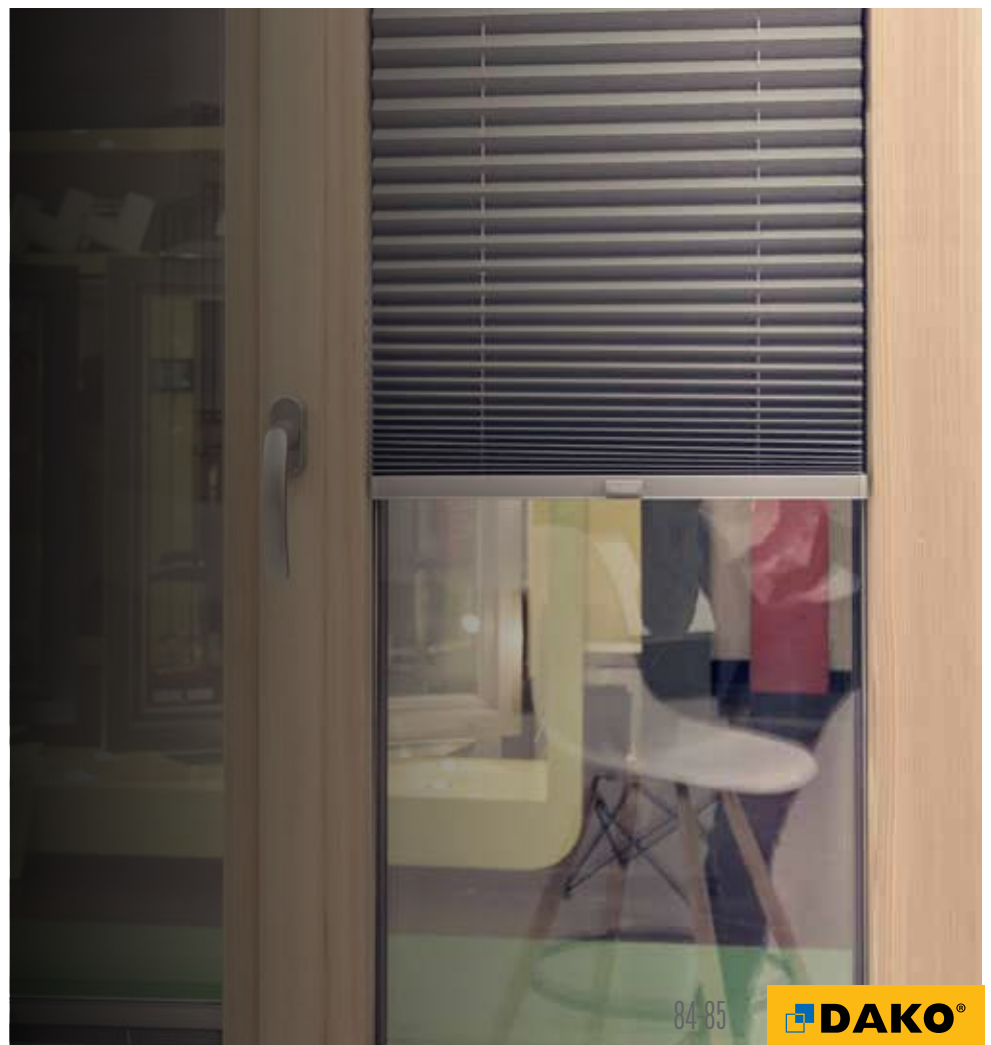

## ROLLER BLINDS IN AN ALUMINUM CASSETTE


- + systems:  
DK- VERA, DK-LUISA (with the possibility of electric control)

## ROLLER BLINDS IN A PVC CASSETTE

- + systems:  
DK- NINA, DK - IGA, DK-KLARA and DK-ROMA

## DAY/NIGHT SYSTEM

- + is available in a free-hanging version, without side guide rails (DK-STELLA) and in a pvc cassette (DK-KLARA and DK-ROMA)

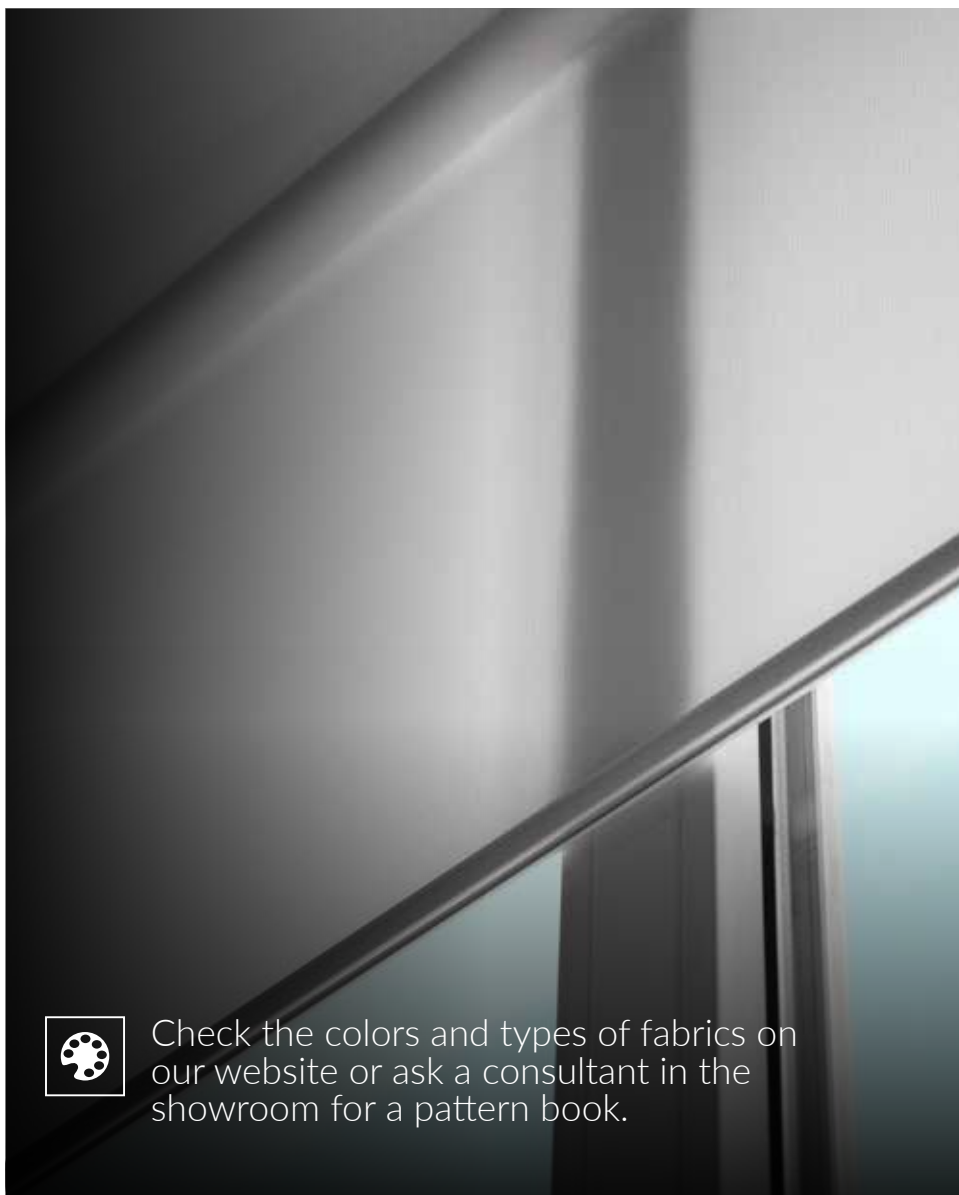

Check the colors and types of fabrics on our website or ask a consultant in the showroom for a pattern book.

## Textile roller blinds

- + practical window covers that allow you to **REGULATE THE AMOUNT OF LIGHT** in the rooms and their darkening
- + **PROTECTING THE PRIVACY** of home-owners
- + **AESTHETIC APPEARANCE** guaranteed by high quality workmanship
- + **WIDE SELECTION OF FABRICS AND COLORS** allows to give them an individual character
- + **SEVERAL INSTALLATION OPTIONS** and different design variants ensure high functionality of the covers



# MOSQUITO NETS

---

A way for opened windows  
and comfortable airing.

- + **HOUSE PROTECTION** against troublesome insects and bugs
- + **PROTECTING INTERIORS** against leaves and flowers falling from the trees
- + **CAN BE FITTED** to almost any type of window or terrace door or it can be integrated into an external roller blind

## MOSQUITO NET TYPES

### WINDOW MOSQUITO NET

popular solution in the form of a mosquito net stretched on a frame mounted on a window frame with the use of non-invasive hooks. The construction of the mosquito net does not open.

### DOOR MOSQUITO NET

frame mosquito net designed for mounting on additional hinges in the entrance door or balcony door. The construction of the mosquito net is functional.

### ROLL-UP MOSQUITO NET

a solution referring to the structure of textile roller blinds - equipped with a cassette and side guide rails. The mosquito net is rolled up on a cassette placed on the window frame.

### SLIDING MOSQUITO NET

a type of mosquito net consisting of a net stretched on an aluminum frame and guide rails, usually mounted in sliding doors. The structure is opened by sliding horizontally.

### PLEATED MOSQUITO NET

A modern solution made of pleated mesh stretched on an aluminum profile. When closing, the mesh of the mosquito net is folded and depending on the chosen version, it is hidden in the profile to the side or upwards.



In selected roller shutter systems we also offer a version with a mosquito net rolled up together with the roller shutter to the roller shutter box

# GLOSSARY

## of terms

**WINDOW FRAME**, also called a frame is a structural element of the window embedded in the wall, which connects it permanently with the window opening. The sashes - one or several - are attached to the frame by means of hinges.

**WINDOW SASH**, opening part of the window. It is equipped with a handle that allows the operation and control of the sash. The sash, depending on the fitting used can be turn, tilt, or tilt and turn.

**WINDOW SEALS** are elements that ensure the tightness of windows. As a standard, two types of seals are installed in windows - glazing and resistance seals (called bumpers or rebounders). Both of them prevent water from getting inside the window profile and so prevent from rusting of the fittings. Resistance seals are also a barrier to wind, dust and noise. There are always two glazing seals - one on the outside and the other on the inside of the window. Flexibility and resistance to changing weather conditions is provided by the material from which they are made, that is EPDM or TPS.

**HEAT TRANSFER COEFFICIENT** is a value that indicates how much heat is lost per square meter of the surface area (for example, windows or doors) in one hour if the outside air temperature is one degree lower than in the room.

The heat transfer coefficient is marked with  $U$  [ $W/m^2K$ ]. The lower its value, the better - the low heat transfer coefficient informs about the fact that windows and doors have good thermal insulation properties and guarantee the reduction of heat loss.

**THE ACOUSTIC INSULATION** parameters are determined by the coefficient  $R_w$  (dB), which informs about the degree of attenuation of noise coming from the outside

the building. The higher the coefficient value, the better protection against noise is guaranteed by the window. The value of this parameter is influenced by several elements - tightness of windows, their dimensions, acoustic insulation of glass inserts and profile construction.

**RC (RESISTANCE CLASSES)** a scale determining the level of burglary protection class for windows and doors on a six-stage scale. In the single-family building industry, products in RC2\RC3 classes are most often used. The PN-EN 1627 standard specifies six classes of burglary resistance of construction products, including windows and doors, and specifies the methods and attempts to gain access for them. Certificates confirming increased resistance to burglary are issued by certification bodies conducting conformity assessment activities, which have active accreditation for this scope of testing.

**CLASS OF PVC WINDOW PROFILE AND NUMBER OF CHAMBERS** Individual classes of profiles vary in terms of profile wall thickness and are determined in accordance with applicable standards. The class of window profiles mainly affects the stiffness of the window profile and the load-bearing capacity of the welded corners of the window sections. The window profile itself consists of chambers whose task is to improve the thermal properties of windows. Nowadays, a 5-chamber profile seems to be the standard below which you shouldn't go down in order to keep the thermal performance of windows at a satisfactory level.

**CLASS A PROFILES** - the minimum thickness of the visible wall is greater or equal to 2,8mm, and the invisible wall is greater or equal to 2,5 mm. Such a solution ensures greater window stability, better thermal insulation properties and with appropriate glazing, effective protection against external noise.



**CLASS B PROFILES** the minimum thickness of the visible wall is greater or equal to 2,5 mm, and the invisible 2 mm (class C includes profiles whose minimum visible and invisible wall thickness is not specified). The window, whose profile is class A, will therefore be more rigid and stable than B and C class windows.

**FITTINGS** are elements of a window whose primary task is to maintain the tightness and to open, close and tilt window or door sashes. The fittings are also responsible for security, protecting against burglary. One of their key elements is the handle, as it is with it that we change the position of the sash. Nowadays, the most common fittings in windows are the circumferential fittings (also called peripheral fittings), i.e. the ones that are located around the entire circumference of the sash. When closed, they press the sash evenly against the frame. This ensures tightness and prevents profile deformation. What kind of circumferential fittings we choose depends on how our windows will open. You can choose between turn, which will allow you to fully open the window and tilt, allowing only for tilting the sash. However, the most convenient solution is the hardware that combines both functions, i.e. Tilt and Turn.

**MICROVENTILATION** is a function provided by appropriate fittings, which gives the possibility of incomplete closing of the window sash. By using this variant, the sash is not in close contact with the frame, and a few millimeters wide gap is created between them to allow air circulation, while protecting the sash against opening in case of a stronger wind blast.

#### **FIXED POST / MOVABLE POST**

The post is an element of the window construction separating its quarters - depending on the window construction possibilities or investors' preferences, it can be in fixed or so called movable version.

**FIXED POST** is an element permanently connected to the window frame, thanks to which the bigger statics are preserved and thus the construction is more resistant to strong wind or burglary attempts. In such a solution, each sash operates independently, which allows for the use of the tilt and turn mechanism in both sashes (at double-sash windows).

In the case of a **MOVABLE POST**, these elements of the window construction are not permanently connected to the window sash frame - and the post is created by overlapping parts of the sash faces. In this variant only one handle is used and to open the second sash requires (after opening the first one) unlocking the catches located inside the sash frame. An important advantage of the movable post is the opening clearance, which is not limited by a vertical post, and is almost always used for balcony doors, where a large light passage is desired.

**GLAZING PACKAGE** standard solution for glazing windows and doors, currently the standard is to use two or three glazed packages, separated by a distance frame and filled with noble gases. The space between two panes separated by a spacer is called a chamber. Single, double or triple chamber glazed units are available on the market.

**SPACER FRAME** (inter-pane)- element of the glazing pack that seals the edges of the glazing units and separates the panes from each other. Most frames are made of aluminum, whose high thermal conductivity makes the heat escape through the window. Frames are available in different color variants and have different parameters such as the warm edge spacer frame.

**SAFETY GLASS** is not an anti-burglary glass, but one that does not create a risk of injury in the event of damage. After breaking, the safety glass will fall apart into blurred fragments or due to the protection of a special film, will remain intact.

**PANE BARS** are decorative, thin slats that divide the glass into sections. The most commonly used solutions in this area are Viennese pane bars, which are glued on the outside of the glass or the so-called internal pane bars, which are placed inside the glazing units.







### **A PRESTIGIOUS POLISH BRAND CLOSE TO YOU**

Commitment, passion and hard work are the features due to which the family company DAKO, established in 1994 in Nowy Sącz, is today a thriving brand with an established position on the joinery market. A modern machine park with an area of 26 000 m<sup>2</sup>, working under the supervision of qualified specialists, allows us to provide our customers with products of the highest quality. Thanks to an extensive network, well equipped showrooms and professional support of sale advisers, DAKO products are available almost everywhere.

### **25 YEARS OF EXPERIENCE AROUND THE WORLD**

The long history of the brand's existence means successes not only on the domestic market, but also experience on foreign markets such as Belgium, France, Germany, Italy, Canada, New Zealand, or the USA and Japan. Currently, more than half of the production is made up of various types of products that are purchased by export markets from all over Europe, whose trust in the brand is due to the high quality of services offered.

### **COMPREHENSIVE PRODUCT OFFER**

The high quality of the brand's products is confirmed not only by numerous and systematic tests and certificates or a long warranty period. The most reliable and valuable opinions about our products are primarily a growing group of satisfied customers who have placed their trust in DAKO windows, doors, roller shutters and garage doors, choosing a comprehensive brand offer to make their dreams of their own home come true. We are particularly proud of this fact.



# INDEX of

## photographs

### WINDOWS

**p. 4**

tilt-and-turn windows + corner connector | incorporated roller blinds external DK-RSP | grey anthracite

**p. 8-9**

HST lift – sliding terrace doors | PVC | dark grey silk

**p.11**

joinery set in grey anthracite color (RAL 7016) | pvc windows with external roller shutters (incorporated roller shutters) | HST sliding terrace doors | fixed glazings (fixed windows) | overlay aluminum external door with wooden handrail | garage door with DK-GP smooth panel

**p. 13**

fixed window (fixed glazing) | PVC | dark grey silk

**p. 14 – 15**

HKS tilt – sliding terrace doors | tilt and turn window | PVC | white

**p. 16 – 17**

tilt and turn windows | PVC | grey anthracite

**p. 18 – 19**

fixed window (fixed glazing) | PVC | grey anthracite

**p. 22**

tilt and Turn windows | PVC | white

**p. 26 – 27**

window | HST lift - sliding terrace doors | fixed glazing | meranti wood | light oak

**p. 30 – 31**

window | HST lift - sliding terrace doors | fixed glazing | meranti wood | light oak

**p. 32 – 33**

window divided into fixed glazing and two tilt and turn sashes | meranti wood | light oak

**p. 32-33**

HST lift – sliding terrace doors | PVC | meranti wood | light oak

**p. 34-35**

wood – aluminum window (view from inside) | raw wood

**p. 42**

tilt and turn window | aluminium | RAL 7016

**p. 43**

window mounted in the corner | aluminum

**p. 44**

tilt and turn balcony window | aluminium | RAL 7035

**p. 50**

Secustic New York handle | titanium

**p. 53-55**

tilt and turn balcony window with internal pane bars | PVC | white

### TERRACE DOORS

**p. 58-59**

HST lift – sliding terrace doors | PVC | grey anthracite

**p. 61**

HST lift – sliding terrace doors | PVC | grey anthracite

**p. 62-63**

sliding terrace doors with a concealed DA-SkyLine frame | aluminium | black

**p. 65**

sliding terrace doors with a concealed DA-SkyLine frame | aluminium | black

**p. 66-67**

HST lift - sliding terrace doors | PVC | dark grey silk

**p. 70**

HKS tilt – sliding terrace doors | PVC | grey anthracite

**p. 71**

HKS tilt – sliding terrace doors | PVC | white (top photo)

HKS tilt – sliding terrace doors | PVC | grey anthracite (bottom photo)

**p. 75**

folding door | aluminium | RAL 9005

## WINDOW COVERS

### p. 84 - 85

DK-PAULA pleated textile roller blind |  
fabric P02/1

### p. 86 - 87

DK-KLARA textile roller blind | day/  
night fabric DN18



- All photos included in the index present DAKO products used in the project realizations. We would like to thank the investors for the opportunity to complete the session.
- The presentation of the products in the photos is for illustrative purposes – due to the light in the images - the actual appearance of the colors and textures of individual products may slightly differ.



© Matteo Aroldi  
tutti i diritti riservati

Photos on pages 26-35  
courtesy of Nasi Mazzucchelli architetti



DAKO.EU