



SEMCO Liquid Membrane™ over concrete

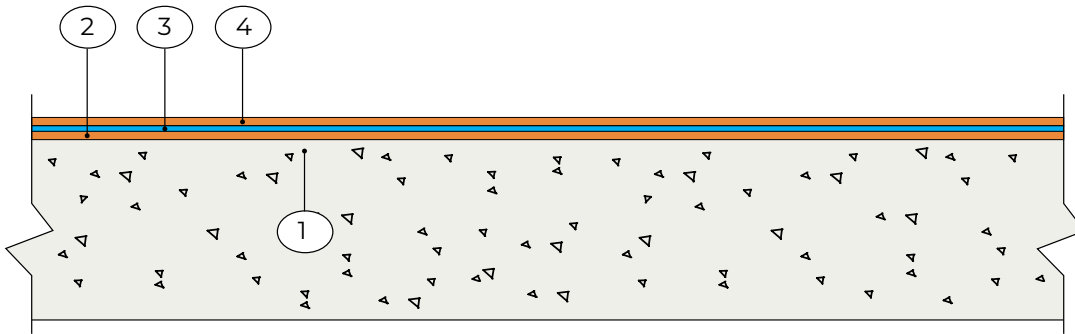

- 1. Existing substrate - concrete
- 2. SEMCO Liquid Membrane™ - 1 coat at 15 mil
- 3. Fabric reinforcement - while wet, embed fabric reinforcement and apply 15 mil to the fabric applied area (for expansion joints that do not exceed 1/8" joints must be filled prior to bridging)
- 4. SEMCO Liquid Membrane™ - 1 coat at 15 mil

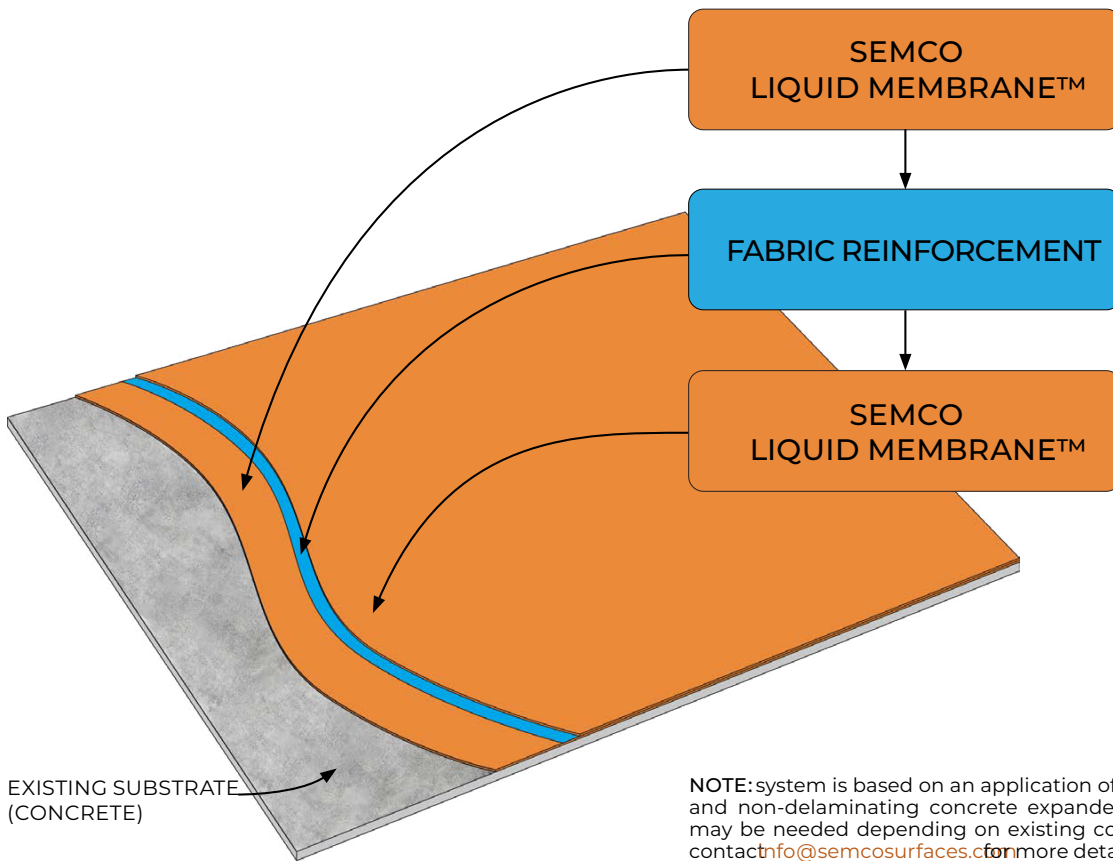

NOTE: system is based on an application of sound and non-delaminating concrete expanded system may be needed depending on existing conditions, contact info@semcosurfaces.com for more details

